

A man with glasses, wearing a light grey t-shirt, blue jeans, and brown shoes, stands with his hands in his pockets in a modern, open-plan living and kitchen area. The room features large windows and sliding glass doors that look out onto a patio with outdoor furniture. The kitchen has dark wood cabinetry and a white countertop. The floor is a light-colored, polished concrete.

wineo

DESIGN FLOORING

**CONFIDENT IN STYLE.
LIVING AND WORKING.**

CONTENTS

| | |
|---------------------|----|
| Product advantages | 06 |
| Application areas | 08 |
| Product composition | 10 |
| Formats | 14 |
| Surfaces | 16 |

Collections

| | |
|------------------|-----------|
| ambra | 18 |
| wineo 600 | 26 |
| wineo 800 | 38 |

| | |
|-------------|----|
| Accessories | 56 |
| Service | 58 |
| Quality | 60 |

| | |
|---------------------|----|
| Collection overview | 62 |
| Symbols | 65 |

wineo 800

CONFIDENT IN STYLE. MAKING AN IMPACT.

Inspired by global trends, wineo 800 comes in attractive wood and stone designs, as well as unique tiles in a variety of formats. The collection is rounded off by creative craft elements such as mosaic and slim planks. The highlight of the collection is that many different colours and formats can be combined, offering limitless opportunities for individual design!



CONFIDENT IN STYLE.

**Where do we find inspiration?
Where can we feel the spirit of the
times? Our designers were looking
for the latest trends – with the aim
of creating extraordinary collections
that are characterised in particular:
by confidence in style.**

The design flooring by wineo gives every room a special flair. It derives its inspiration from the warmth of nature or the cool concrete façades of fascinating cities. It convinces with design and functionality for residential and commercial buildings.



PRODUCT ADVANTAGES

Permanently elastic wineo design flooring is impressively functional. Offering numerous product advantages and easy to use, it is a true favourite.



DURABLE

wineo design flooring is **resistant to staining**. Even furniture and chair castors leave no trace.



EASY CARE

The sealed surface makes the design flooring ridiculously **easy to clean**.



QUIET

The soft surface ensures pleasantly **quiet acoustics**.



WARM TO THE FEET

The design flooring feels **pleasantly warm** and is perfect for lounging, playing and living.



SUITABLE FOR UNDERFLOOR HEATING

Installed over underfloor heating, the design flooring provides **additional warmth**.



SUITABLE FOR DAMP AREAS

All wineo design flooring for gluing and clicking in is ideal for damp areas, such as kitchens or bathrooms, as **it does not swell on contact with water**.



GENTLE ON THE ANKLES

The **elastic surface** is gentle on the joints.



NON-SLIP

The **tested surface** ensures safety with every step.

APPLICATION AREAS


The wineo design flooring for gluing and clicking in, with utilization classes of between 23 and 42, is always the right choice – for domestic areas as much as for public authorities or light industrial sector. Product thicknesses of 2 mm to 9 mm make it possible to instal the design floor on virtually any technically adequate subsurface.

i

All wineo design flooring is ideal for damp areas.




HOME + LIVING
Lohas Light | ambra wood

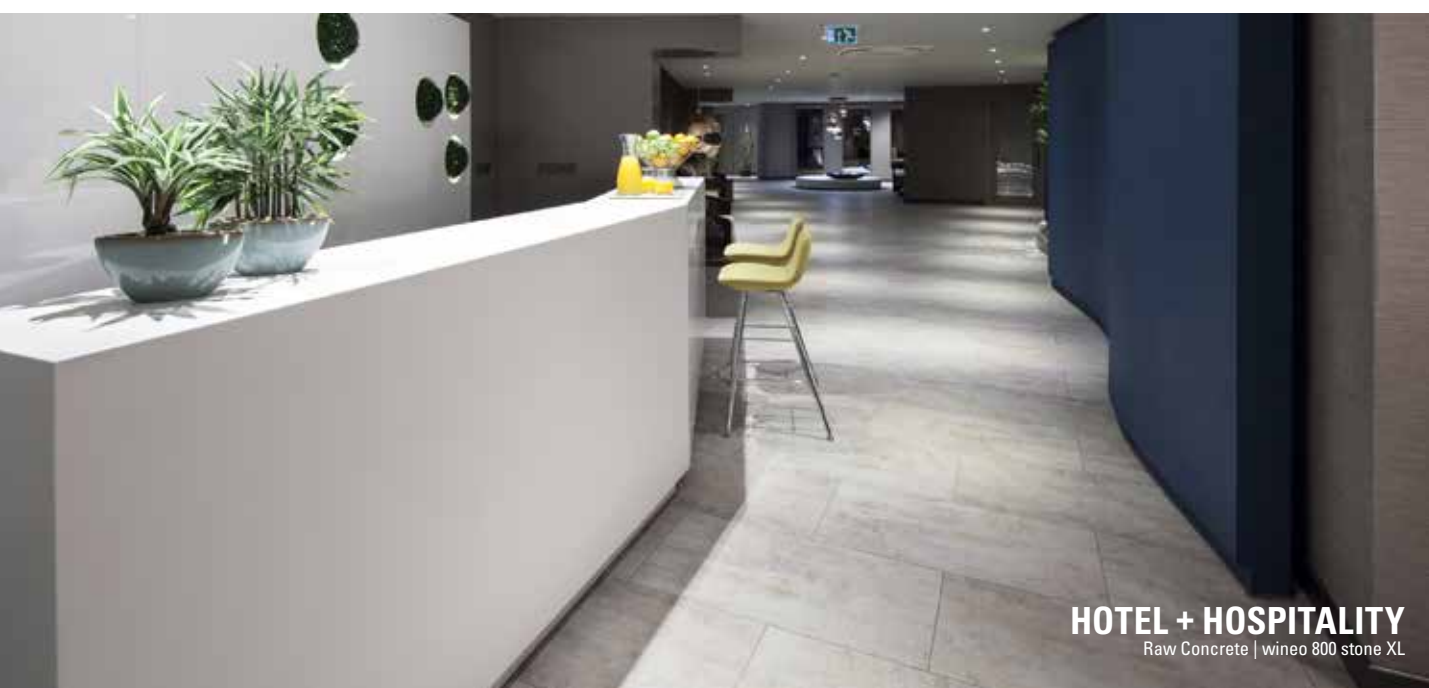

HOTEL + HOSPITALITY
Raw Concrete | wineo 800 stone XL



PUBLIC + EDUCATION
Scandic Grey | wineo 600 wood XL

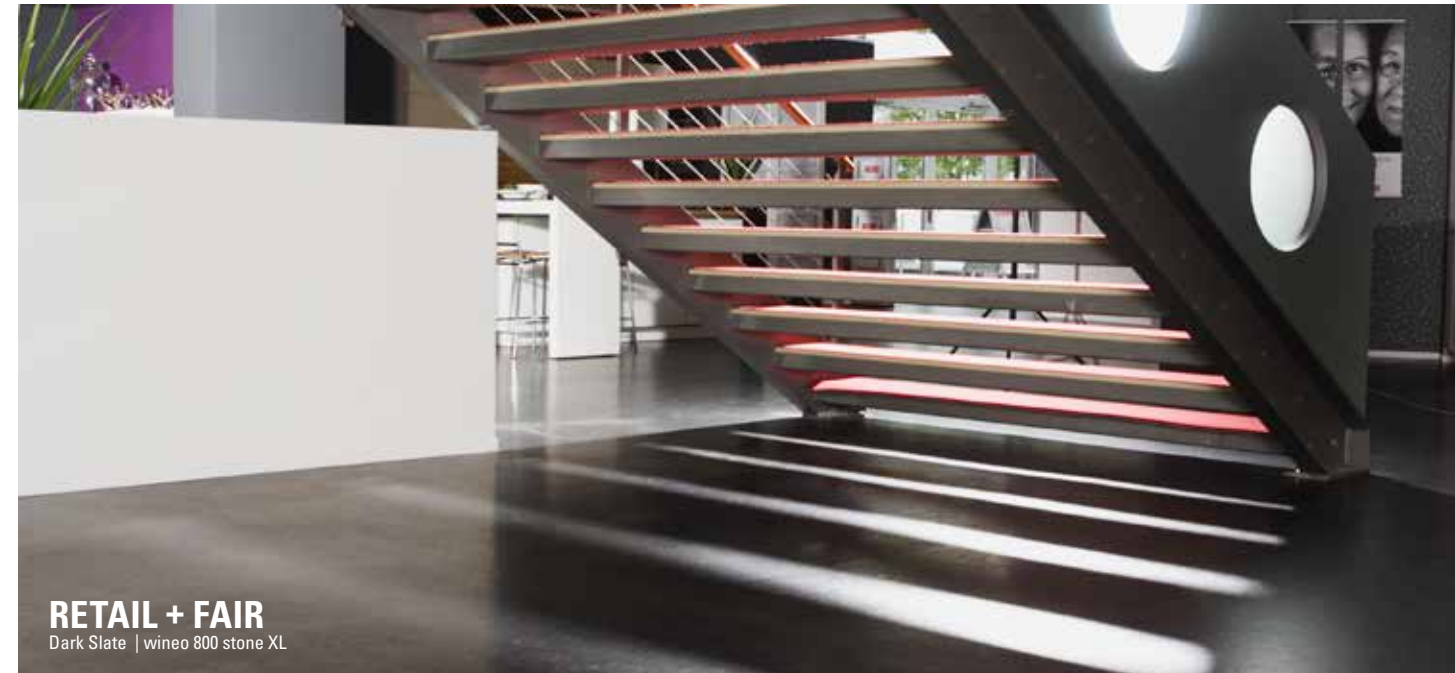

RETAIL + FAIR
Dark Slate | wineo 800 stone XL



PUBLIC BUILDING + SOCIAL HOUSING
Indian Oak | ambra wood




PRODUCT COMPOSITION

Design flooring from wineo is just as varied as your requirements. Whether you are looking for flooring for a new building, renovation, private or for commercial use – wineo has the right product for you.

DESIGN FLOORING FOR GLUING



- very elastic
- minimal thickness of 2 mm to 2.5 mm
- particularly durable and long-lasting
- ideal for refurbishment work and damp areas

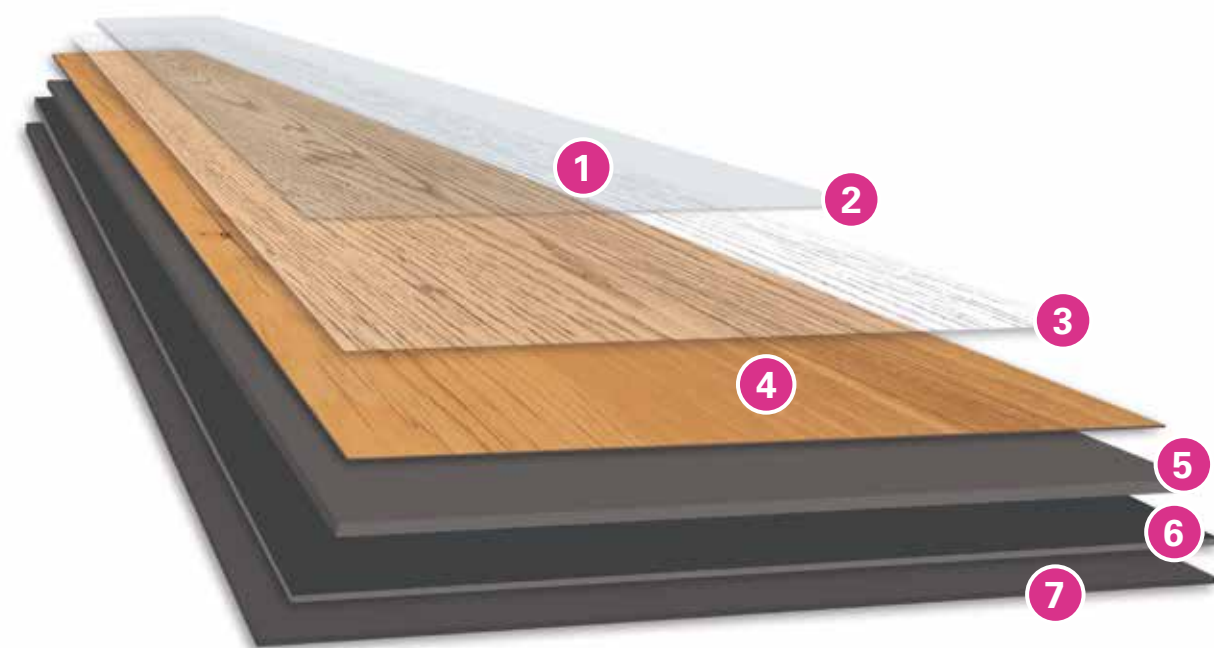


- | | |
|---|--|
| <p>1 Surface seal Protects the product and enables easy cleaning and maintenance.</p> <p>2 Surface texture A range of surface textures ensure an authentic feel and appearance.</p> <p>3 Wear layer Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.</p> <p>4 Design The decor film offers a host of design options.</p> | <p>5 Base layer Lends the product a high level of dimensional stability and optimum point-load resistance.</p> <p>6 Backing With its waffle back texture, it is used to help ensure balance and optimal installation.</p> <p>7 Insulation mat Available separately: the silentPREMIUM self-adhesive insulation mat for bridging any unevenness and reducing footfall noise levels.</p> |
|---|--|

DESIGN FLOORING FOR CLICKING IN



- very elastic
- available in a thickness of 4.5 mm to 5 mm
- connect locking for particularly quick and tidy installation

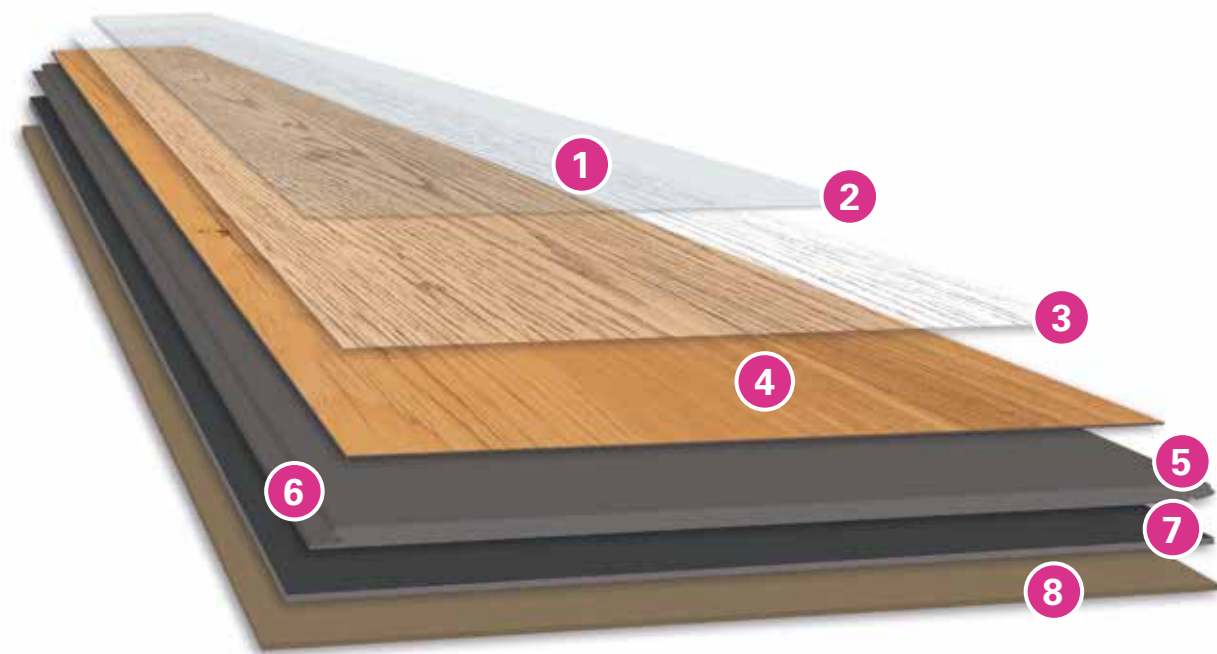


- 1 Surface seal**
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**
A range of surface textures ensure an authentic feel and appearance.
- 3 Wear layer**
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**
The decor film offers a host of design options.
- 5 Base layer with glass fibre reinforcement**
Lends the product an especially high level of dimensional stability and optimum point-load resistance.

- 6 Profile connection**
The Connect locking system was specially developed for elastic design flooring and enables planks to be Clicked into each other without any problems.
- 7 Backing**
With its waffle back texture, it is used to help ensure balance and optimal installation.
- 8 Insulation mat**
Available separately: the silentCOMFORT insulation mat with non-slip effect for bridging any unevenness and reducing footfall noise levels.

MULTI-LAYER DESIGN FLOORING FOR CLICKING IN



- Design flooring surface on Aqua-Protect® HDF core board
- 9 mm thick for optimally bridging any unevenness in the substrate
- ideal for refurbishment work and damp areas
- particularly heat-resistant and dimensionally stable
- integrated Sound-Protect insulation mat for reducing footfall sound
- LocTec® locking for easy installation

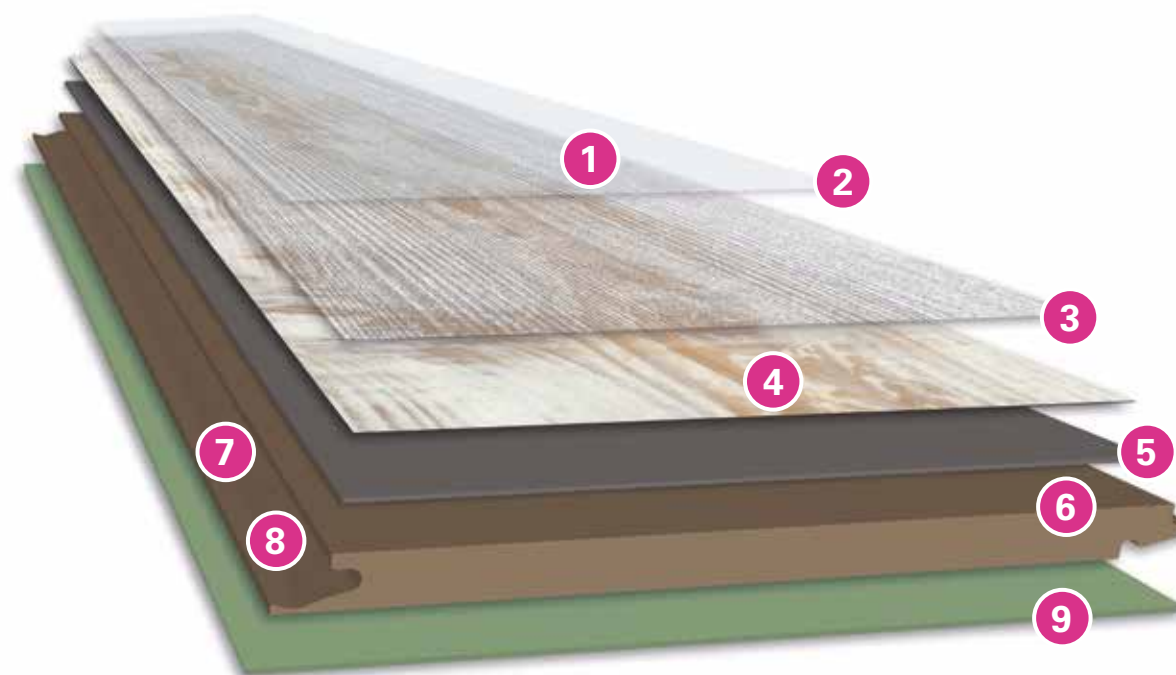







- 1 Surface seal**
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**
A range of surface textures ensure an authentic feel and appearance.
- 3 Wear layer**
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**
The decor film offers a host of design options.
- 5 Base layer**
Lends the product a high level of dimensional stability and optimum point-load resistance.

- 6 Core board**
The HDF Aqua-Protect® core board is swell-resistant.
- 7 Profile connection**
Thanks to the tried-and-tested LocTec® locking system, panels can be Clicked into each other without any problems.
- 8 Profile seal**
A special profile seal protects the entire connection system from moisture.
- 9 Insulation mat**
The footfall-sound-reducing system Sound-Protect Eco is already securely integrated into wineo Multi-Layer flooring.









FORMATS

To help ensure the optimum effect of each decor, there are different formats, such as a generously dimensioned XL planks in a rustic style and handy tile formats – for an all-round stylish design.












ambra

| wood | | stone | |
|---|------------------------------|---|-----------------------------|
|  | Glue 1200 × 180 mm |  | Glue 609,6 × 304,8 mm |
|  | Click 1212 × 185 mm |  | Click 600 × 314 mm |
|  | Multi-Layer 1200 × 212 mm |  | Multi-Layer 591 × 287 mm |

wineo 600

| wood | | stone | |
|---|------------------------|---|--------------------------|
|  | Glue 1200 × 180 mm |  | Glue 609,6 × 304,8 mm |
|  | Click 1212 × 187 mm |  | Click 600 × 317 mm |
| DLC00011: 1212 × 185 mm | | | |
| wood XL | | stone XL | |
|  | Glue 1505 × 235 mm |  | Glue 900 × 450 mm |
|  | Click 1505 × 237 mm |  | Click 914 × 480 mm |

wineo 800

| wood | | tile | |
|---|------------------------|---|--------------------------|
|  | Glue 1200 × 180 mm |  | Glue 457,2 × 457,2 mm |
|  | Click 1212 × 185 mm | | |
| wood XL | |  | Glue 914,4 × 457,2 mm |
|  | Glue 1505 × 235 mm | | |
|  | Click 1505 × 237 mm |  | Glue 914,4 × 914,4 mm |
| | | | |
| stone XL | |  | Glue 914,4 × 457,2 mm |
| | |  | Click 914 × 480 mm |
| | | | |
| | | craft | |
| | |  | Glue 457,2 × 457,2 mm |
| | |  | Glue 914,4 × 101,6 mm |

SURFACES

wineo design flooring comes in different surfaces, which are designed to suit the decors. Wood structures, for example, ensure that your flooring feels particularly authentic. (Please refer to the labelling under the design pictures.)



Fine wooden pore



Rough wood structure



Exclusive wood structure



Sand structure



Rough sawn surface



Stone structure



Slate structure



Travertine



Registered embossed surface



Brushed structure



Handscraped l



Glossy surface



Designs with a registered embossed surface look especially authentic, as the surface structure is in sync with the wood grain. The expression of knots and lines in the wood gives the floor its unique originality.



ambra

3-in-1

CONFIDENT IN STYLE. COMBINED.

The ambra from wineo is an all-rounder for your home. The collection is available in three product types, providing the perfect flooring solution for all application areas. From elastic design flooring for gluing or clicking in to Multi-Layer for clicking in – discover 16 modern wood designs and 6 stone decors for your home or for commercial properties.

ambra wood

- Installation type:

Glue
- Product thickness:

2 mm
- Wear layer:

0.3 mm
- Planks / boxes:

18/3.89 m²
- Installation type:

Click
- Product thickness:

4.5 mm
- Wear layer:

0.3 mm
- Planks / boxes:

10/2.24 m²
- Installation type:


Click (Multi-Layer)*
- Core board:

Aqua-Protect®
- Product thickness:


9 mm
- Wear layer:

0.3 mm
- Planks / boxes:


8/2.04 m²

Dryback

1200 × 180 mm

Connect

1212 × 185 mm

LocTec

Multi-Layer

1200 × 212 mm

ambra stone

- Installation type:

Glue
- Product thickness:

2 mm
- Wear layer:

0.3 mm
- Tiles / boxes:

18/3.34 m²
- Installation type:

Click
- Product thickness:

4.5 mm
- Wear layer:

0.3 mm
- Tiles / boxes:

12/2.26 m²
- Installation type:


Click (Multi-Layer)*
- Core board:

Aqua-Protect®
- Product thickness:


9 mm
- Wear layer:

0.3 mm
- Tiles / boxes:


9/1.53 m²

Dryback

609,6 × 304,8 mm

Connect

600 × 314 mm

LocTec

Multi-Layer

591 × 287 mm



Arizona Oak Light Grey
ambra wood | DEI25418AMW
ambra wood | CEI25418AMW
ambra wood | MLEI25418AMW-N





Long Island
1 strip | Rough wood structure
Skirting board 19/58: 30060492

Glue: DPI101113AMW
Click: CPI101113AMW
Click (Multi-Layer): MLPI101113AMW-N



Lohas Light
1 strip | Rough wood structure
Skirting board 19/58: 30060496

Glue: DPI73212AMW
Click: CPI73212AMW
Click (Multi-Layer): MLPI73212AMW-N



Highlands Light
1 strip | Fine wooden pore
Skirting board 19/58: 30060491

Glue: DEI75213AMW
Click: CEI75213AMW
Click (Multi-Layer): MLEI75213AMW-N



Wild Apple
1 strip | Rough wood structure
Skirting board 19/58: 30060482

Glue: DAP61413AMW
Click: CAP61413AMW
Click (Multi-Layer): MLAP61413AMW-N



Arizona Oak Light Grey
1 strip | Rough wood structure
Skirting board 19/58: 30060493

Glue: DEI25418AMW
Click: CEI25418AMW
Click (Multi-Layer): MLEI25418AMW-N



Boston Pine Grey
1 strip | Rough wood structure
Skirting board 19/58: 30060493

Glue: DPI71713AMW
Click: CPI71713AMW
Click (Multi-Layer): MLPI71713AMW-N



Natural Apple
1 strip | Rough wood structure
Skirting board 19/58: 30060436

Glue: DAP61416AMW
Click: CAP61416AMW
Click (Multi-Layer): MLAP61416AMW-N



Golden Canadian Oak
1 strip | Rough wood structure
Skirting board 19/58: 30060486

Glue: DEI54612AMW
Click: CEI54612AMW
Click (Multi-Layer): MLEI54612AMW-N



Arizona Oak Grey
1 strip | Rough wood structure
Skirting board 19/58: 30060484

Glue: DEI25114AMW
Click: CEI25114AMW
Click (Multi-Layer): MLEI25114AMW-N



Lohas Greige
1 strip | Rough wood structure
Skirting board 19/58: 30060497

Glue: DPI73217AMW
Click: CPI73217AMW
Click (Multi-Layer): MLPI73217AMW-N



Indian Oak
1 strip | Rough wood structure
Skirting board 19/58: 30060488

Glue: DEI55413AMW
Click: CEI55413AMW
Click (Multi-Layer): MLEI55413AMW-N



Highlands Dark
1 strip | Fine wooden pore
Skirting board 19/58: 30060490

Glue: DEI75212AMW
Click: CEI75212AMW
Click (Multi-Layer): MLEI75212AMW-N



Grey Canadian Oak
1 strip | Rough wood structure
Skirting board 19/58: 30060487

Glue: DEI54615AMW
Click: CEI54615AMW
Click (Multi-Layer): MLEI54615AMW-N



Boston Pine Cream
1 strip | Rough wood structure
Skirting board 19/58: 30060495

Glue: DPI71717AMW
Click: CPI71717AMW
Click (Multi-Layer): MLPI71717AMW-N



Boston Pine Brown
1 strip | Rough wood structure
Skirting board 19/58: 30060494

Glue: DPI71716AMW
Click: CPI71716AMW
Click (Multi-Layer): MLPI71716AMW-N



Bretagne Oak
1 strip | Rough wood structure
Skirting board 19/58: 30060489

Glue: DEI63614AMW
Click: CEI63614AMW
Click (Multi-Layer): MLEI63614AMW-N



Monza
ambra stone | DM35811AMS
ambra stone | CM35811AMS
ambra stone | MLM35811AMS-N



Siena
Travertine
Skirting board 19/58: 30060435 (White)
Glue: DS21106AMS
Click: CS21106AMS
Click (Multi-Layer): MLS21106AMS-N



Monza
Travertine
Skirting board 19/58: 30060435 (White)
Glue: DM35811AMS
Click: CM35811AMS
Click (Multi-Layer): MLM35811AMS-N



Berlin Night
Sand structure
Skirting board 19/58: 30060435 (White)
Glue: DBN28412AMS
Click: CBN28412AMS
Click (Multi-Layer): MLBN28412AMS-N



Dakar
Slate structure
Skirting board 19/58: 30060435 (White)
Glue: DD21833AMS
Click: CD21833AMS
Click (Multi-Layer): MLD21833AMS-N



Harlem
Sand structure
Skirting board 19/58: 30060435 (White)
Glue: DH50515AMS
Click: CH50515AMS
Click (Multi-Layer): MLH50515AMS-N



Berlin Day
Sand structure
Skirting board 19/58: 30060435 (White)
Glue: DBD284112AMS
Click: CBD284112AMS
Click (Multi-Layer): MLBD284112AMS-N



wineo 600

CONFIDENT IN STYLE. DISPLAYING VARIETY.

With a wear layer of 0.4 mm, wineo 600 for gluing or clicking in is suitable for a broad range of applications. The 24 wood designs and 8 stone looks, some of which have real joints, are not only suitable for commercial property but also for private customers, who appreciate resilient flooring in trendy designs.

Dryback

Planks / boxes: 18/3.89m²



Wear layer: 0.4mm

DLC00011: 1212 × 185 mm

8/1.79m² (DLC00011)



Wear layer: 0.4mm

Planks / boxes: 12/4.24m²

Wear layer: 0.4mm

Planks / boxes: 6/2.14 m²

wineo 600 stone | stone XL



Dryback

Wear layer: 0.4mm

Tiles / boxes: 18/3.34m²



Wear layer: 0.4 mm

Tiles / boxes: 10/1.90m²



Dryback


Wear layer: 0.4mm

Tiles / boxes: 12/4.86m²




Wear layer: 0.4 mm

Tiles / boxes: 6/2.63m²

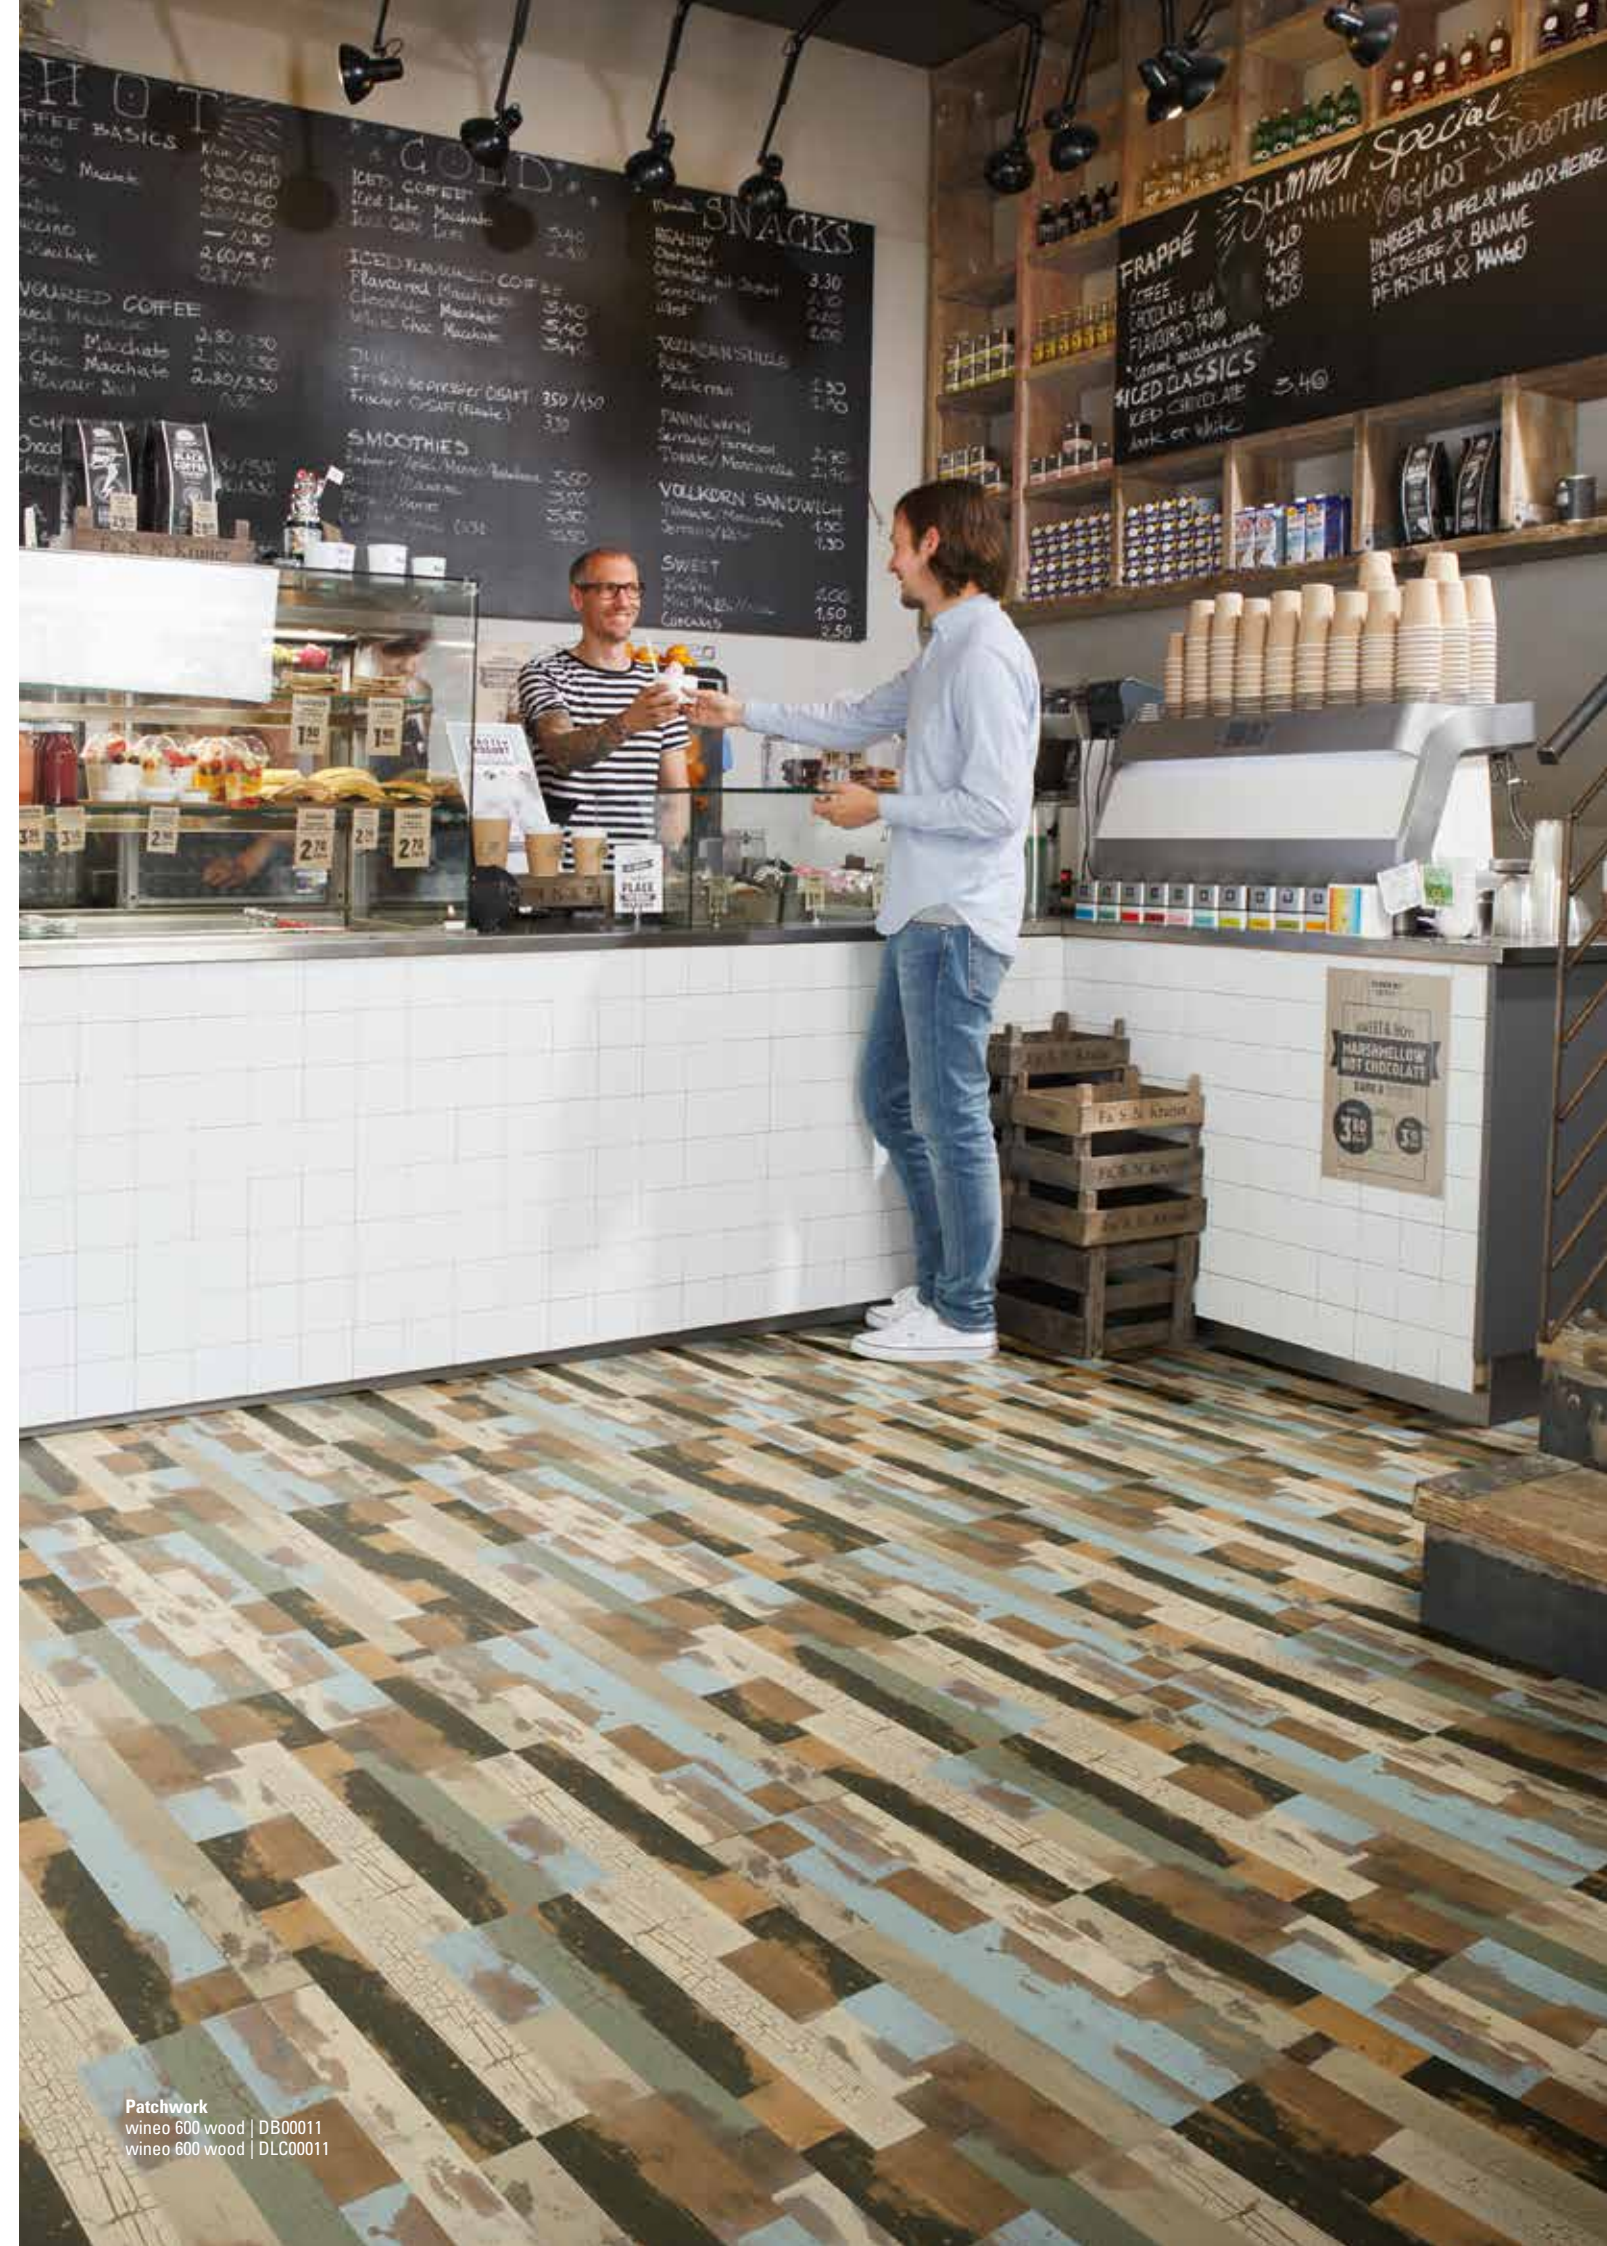

Patchwork
wineo 600 wood | DB00011
wineo 600 wood | DLC00011

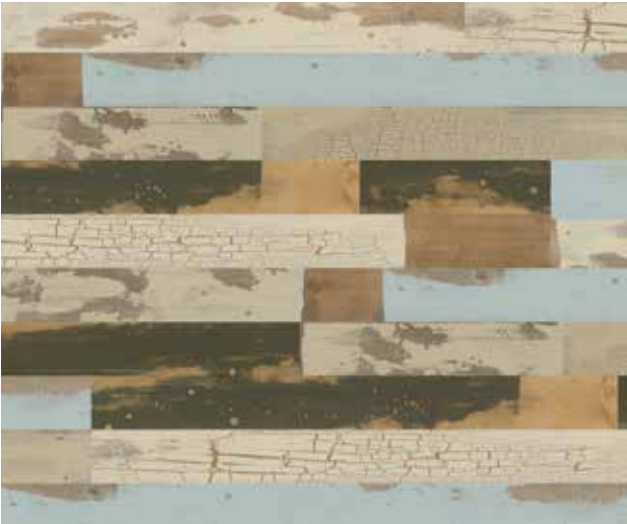

Patchwork
2 strip | Rough sawn surface
Skirting board 19/58: 30060435 (White)
Glue: DB00011
Click: DLC00011



Chateau White
1 strip | Rough sawn surface
Skirting board 19/58: 30060448
Glue: DB00001
Click: DLC00001



Polaris
1 strip | Handscraped I
Skirting board 19/58: 30060435 (White)
Glue: DB00012
Click: DLC00012



Chateau Grey
1 strip | Rough sawn surface
Skirting board 19/58: 30060450
Glue: DB00003
Click: DLC00003



Toscany Pine Grey
1 strip | Rough wood structure
Skirting board 19/58: 30060454
Glue: DB00008
Click: DLC00008



Aurelia Grey
1 strip | Registered embossed surface
Skirting board 19/58: 30060452
Glue: DB00005
Click: DLC00005



Venero Oak Brown
1 strip | Rough sawn surface
Skirting board 19/58: 30060451
Glue: DB00014
Click: DLC00014



Aurelia Provence
1 strip | Registered embossed surface
Skirting board 19/58: 30060451
Glue: DB00004
Click: DLC00004



Toscany Pine
1 strip | Rough wood structure
Skirting board 19/58: 30060454
Glue: DB00007
Click: DLC00007



Calm Oak Nature
1 strip | Handscraped I
Skirting board 19/58: 30060456
Glue: DB00009
Click: DLC00009



Chateau Brown
1 strip | Rough sawn surface
Skirting board 19/58: 30060449
Glue: DB00002
Click: DLC00002



Venero Oak Beige
1 strip | Rough sawn surface
Skirting board 19/58: 30060458
Glue: DB00013
Click: DLC00013



Calm Oak Cream
1 strip | Handscraped I
Skirting board 19/58: 30060457
Glue: DB00010
Click: DLC00010



Aurelia Cream
1 strip | Registered embossed surface
Skirting board 19/58: 30060453
Glue: DB00006
Click: DLC00006

wineo 600 wood

XL



Aumera Oak Grey*
1 strip | [Registered embossed surface](#)
Skirting board 19/58: 30060466

Glue: DB00029
Click: DLC00029



Scandic Grey
1 strip | Rough wood structure
Skirting board 19/58: 30060462

Glue: DB00025
Click: DLC00025



Scandic White
1 strip | Rough wood structure
Skirting board 19/58: 30060463

Glue: DB00026
Click: DLC00026



Victoria Oak White*
1 strip | [Registered embossed surface](#)
Skirting board 19/58: 30060469

Glue: DB00032
Click: DLC00032



Woodstock Cream
1 strip | Rough wood structure
Skirting board 19/58: 30060461

Glue: DB00024
Click: DLC00024



Victoria Oak Native*
1 strip | [Registered embossed surface](#)
Skirting board 19/58: 30060458

Glue: DB00031
Click: DLC00031



Aumera Oak Native*
1 strip | [Registered embossed surface](#)
Skirting board 19/58: 30060467

Glue: DB00028
Click: DLC00028



Victoria Oak Grey*
1 strip | [Registered embossed surface](#)
Skirting board 19/58: 30060467

Glue: DB00030
Click: DLC00030



Woodstock Honey
1 strip | Rough wood structure
Skirting board 19/58: 30060460

Glue: DB00023
Click: DLC00023



Aumera Oak Dark*
1 strip | [Registered embossed surface](#)
Skirting board 19/58: 30060464

Glue: DB00027
Click: DLC00027



Lava Grey
wineo 600 stone | DB00015
wineo 600 stone | DLC00015



Polar Travertine
Sand structure
Glue: DB00017
Click: DLC00017 (Real joint)



Silver Slate
Slate structure
Glue: DB00018
Click: DLC00018 (Real joint)



Lava Grey
Sand structure
Glue: DB00015
Click: DLC00015



Lava Black
Sand structure
Glue: DB00016
Click: DLC00016



Navajo Cream
Stone structure

Glue: DB00019
Click: DLC00019



Navajo Grey
Stone structure

Glue: DB00020
Click: DLC00020



Brooklyn Day
Stone structure

Glue: DB00021
Click: DLC00021



Brooklyn Night
Stone structure

Glue: DB00022
Click: DLC00022



Brooklyn Night
wineo 600 stone XL | DB00022
wineo 600 stone XL | DLC00022

Anna, Stylist

»As a stylist, I am on my feet all day long. So I appreciate every single minute of being on an elastic design flooring, which is gentle on the joints.«

**wineo 800**

CONFIDENT IN STYLE. MAKING AN IMPACT.

Developed with the help of trend scouts, wineo 800 provides plenty of impressive new inspirations. The collection offers 42 innovative designs for gluing or clicking, in a total of 8 different formats. With a wear layer of 0.55 mm, wineo 800 is a premium design covering and is therefore ideal for commercial property and discerning private customers.









Infinity Light Mixed
wineo 800 craft | DB00072

COMBINATIONS

wineo 800 in particular offers plenty of opportunities for creatively combining various decors and formats for gluing. This means that any floor can be transformed, making it truly distinctive and unique.



wineo 800 wood | wood XL

| | | | |
|--------------------|--------------|---|--|
| Installation type: | Glue |  |  |
| Product thickness: | 2.5 mm | | |
| Wear layer: | 0.55 mm | | |
| Planks / boxes: | 16 / 3.46 m² | | |
| Installation type: | Click |  |  |
| Product thickness: | 5 mm | | |
| Wear layer: | 0.55 mm | | |
| Planks / boxes: | 8 / 1.79 m² | | |
| Installation type: | Glue |  |  |
| Product thickness: | 2.5 mm | | |
| Wear layer: | 0.55 mm | | |
| Planks / boxes: | 12 / 4.24 m² | | |
| Installation type: | Click |  |  |
| Product thickness: | 5 mm | | |
| Wear layer: | 0.55 mm | | |
| Planks / boxes: | 6 / 2.14 m² | | |



Mona, Gallery Owner
»For my exhibitions, it is important that the flooring provides a stage for the works of art so that their full effect can be appreciated. In the background, high-quality and hard-wearing. That's precisely what flooring should be.«

Helsinki Rustic Oak
wineo 800 wood XL | DB00068
wineo 800 wood XL | DLC0068

SCANDINAVIAN LIGHT WOOD



Copenhagen Frosted Pine
1 strip | Handscraped l
Skirting board 19/58: 30060550

Glue: DB00076
Click: DLC00076



Gothenburg Calm Oak
1 strip | Exclusive wood structure
Skirting board 19/58: 30060556

Glue: DB00077
Click: DLC00077



Riga Vibrant Pine
1 strip | Exclusive wood structure
Skirting board 19/58: 30060554

Glue: DB00082
Click: DLC00082



Helsinki Rustic Oak
1 strip | Registered embossed surface
Skirting board 19/58: 30060546

Glue: DB00068
Click: DLC00068



Lund Dusty Oak
1 strip | Registered embossed surface
Skirting board 19/58: 30060543

Glue: DB00065
Click: DLC00065

NATURAL WARM WOOD



Salt Lake Oak
1 strip | Exclusive wood structure
Skirting board 19/58: 30060549

Glue: DB00079
Click: DLC00079



Wheat Golden Oak
1 strip | Exclusive wood structure
Skirting board 19/58: 30060552

Glue: DB00080
Click: DLC00080



Honey Warm Maple
1 strip | Exclusive wood structure
Skirting board 19/58: 30060553

Glue: DB00081
Click: DLC00081



Clay Calm Oak
1 strip | Registered embossed surface
Skirting board 19/58: 30060540

Glue: DB00062
Click: DLC00062



Corn Rustic Oak
1 strip | Registered embossed surface
Skirting board 19/58: 30060542

Glue: DB00064
Click: DLC00064



Mud Rustic Oak
1 strip | Registered embossed surface
Skirting board 19/58: 30060541

Glue: DB00063
Click: DLC00063



Joanne, Fashion Designer
"In my boutique, my customer's individuality is everything. The design of the shop should support the individual style of my clients."

Sardinia Wild Walnut
wineo 800 wood | DB00083
wineo 800 wood | DLC00083

MEDITERRANEAN DARK WOOD



Balearic Wild Oak
1 strip | Exclusive wood structure
Skirting board 19/58: 30060557

Glue: DB00078
Click: DLC00078



Crete Vibrant Oak
1 strip | Exclusive wood structure
Skirting board 19/58: 30060558

Glue: DB00075
Click: DLC00075



Sardinia Wild Walnut
1 strip | Exclusive wood structure
Skirting board 19/58: 30060555

Glue: DB00083
Click: DLC00083



Cyprus Dark Oak
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060544

Glue: DB00066
Click: DLC00066



Santorini Deep Oak
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060539

Glue: DB00061
Click: DLC00061



Ponza Smoky Oak
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060545

Glue: DB00067
Click: DLC00067




Sicily Dark Oak
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060547

Glue: DB00069
Click: DLC00069

wineo 800 stone XL

Installation type: Glue
Product thickness: 2.5mm
Wear layer: 0.55mm
Tiles / boxes: 10/4.18m²




Installation type: Click
Product thickness: 5 mm
Wear layer: 0.55 mm
Tiles / boxes: 6/2.63 m²



wineo 800 tile L | tile XL | tile XXL


Installation type: Glue
Product thickness: 2.5mm
Wear layer: 0.55mm
Tiles / boxes: 16/3.34m²



Installation type: Glue
Product thickness: 2.5mm
Wear layer: 0.55mm
Tiles / boxes: 10/4.18m²




Installation type: Glue
Product thickness: 2.5mm
Wear layer: 0.55mm
Tiles / boxes: 6/5.02m²



wineo 800 craft

Installation type: Glue
Product thickness: 2.5 mm
Wear layer: 0.55 mm
Tiles / boxes: 16/3.34 m²



Installation type: Glue
Product thickness: 2.5mm
Wear layer: 0.55mm
Planks / boxes: 20/1.86m²



**Lucas,
Hotel Manager**

»There's always a lot going on in our lobby. The design flooring successfully creates a peaceful atmosphere, both acoustically and visually.«



Raw Concrete
wineo 800 stone XL | DB00088
wineo 800 stone XL | DLC00088



Raw Concrete
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00088
Click: DLC00088



Rough Concrete
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00089
Click: DLC00089



Calm Concrete
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00094
Click: DLC00094



Heavy Metal
1 strip | Glossy surface
Skirting board 19/58: 30060435 (White)

Glue: DB00084
Click: DLC00084*



Dark Slate
1 strip | Slate structure
Skirting board 19/58: 30060435 (White)

Glue: DB00085
Click: DLC00085*



Silver Slate
1 strip | Slate structure
Skirting board 19/58: 30060435 (White)

Glue: DB00087
Click: DLC00087*



Copper Slate
1 strip | Stone structure
Skirting board 19/58: 30060435 (White)

Glue: DB00091
Click: DLC00091*



Light Sand
1 strip | Stone structure
Skirting board 19/58: 30060435 (White)

Glue: DB00095
Click: DLC00095*



Art Concrete
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00086
Click: DLC00086*



White Marble
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00090
Click: DLC00090

John, Architect

»Today’s requirements are high. Flooring is a design element, which has to fulfil two major requirements: functionality and design – both to a very high quality.«



Solid Dark | Solid Grey | Solid Umbra
wineo 800 tile | DB00096-1
wineo 800 tile | DB00097-1
wineo 800 tile | DB00098-1

URBAN TILE DESIGN



Solid Dark
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00096-1 (XXL)
Glue: DB00096-2 (XL)
Glue: DB00096-3 (L)



Solid Grey
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00097-1 (XXL)
Glue: DB00097-2 (XL)
Glue: DB00097-3 (L)



Solid Taupe
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00099-1 (XXL)
Glue: DB00099-2 (XL)
Glue: DB00099-3 (L)



Solid Umbra
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00098-1 (XXL)
Glue: DB00098-2 (XL)
Glue: DB00098-3 (L)



Solid Sand
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00100-1 (XXL)
Glue: DB00100-2 (XL)
Glue: DB00100-3 (L)



Solid Light
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)

Glue: DB00101-1 (XXL)
Glue: DB00101-2 (XL)
Glue: DB00101-3 (L)



Solid White
1 strip | Handscraped I
Skirting board 19/58: 30060435 (White)

Glue: DB00102-1 (XXL)
Glue: DB00102-2 (XL)
Glue: DB00102-3 (L)



Solid Black
1 strip | Handscraped I
Skirting board 19/58: 30060435 (White)

Glue: DB00103-1 (XXL)
Glue: DB00103-2 (XL)
Glue: DB00103-3 (L)



Mosaic Dark
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)
Glue: DB00093



Mosaic Light
1 strip | Sand structure
Skirting board 19/58: 30060435 (White)
Glue: DB00092



Infinity Dark Solid
1 strip | Exclusive wood structure
Skirting board 19/58: 30060548
Glue: DB00073



Infinity Light Solid
1 strip | Exclusive wood structure
Skirting board 19/58: 30060549
Glue: DB00074



Infinity Dark Mixed*
1 strip | Exclusive wood structure
Skirting board 19/58: 30060435 (White)
Glue: DB00071



Infinity Light Mixed*
1 strip | Exclusive wood structure
Skirting board 19/58: 30060435 (White)
Glue: DB00072

* Mixed=various plank colours in one box



**Carla,
Shop Designer**
*»The flooring is the stage for
providing maximum effect.
When selected carefully, it
is one of the most important
design elements in the room.«*

Mosaic Dark
wineo 800 craft | DB00093

ACCESSORIES

SKIRTING BOARDS

Our range of accessories includes suitable skirting boards, perfectly matching the decors in almost all our design flooring collections. Plain skirting, which can be universally combined with all designs, is also available. You can find advice on suitable skirting boards on the preceding collection pages and in our accessories brochure.



Skirting boards 19/58
MDF base
19 x 58 x 2400 mm



Skirting boards 15/80
MDF base
15 x 80 x 2400 mm

Clipholder fastening system

In order to install wineo skirting boards quickly and easily, we recommend using the Clipholder fastening system. This system enables cables to be invisibly routed and can be removed without any problems whenever you would like to paint or wallpaper the walls.



FEATURE STRIPS

wineo feature strips (width 5 mm) can be used on all design flooring for gluing to enhance the natural plank or tile look. The format of the individual elements is emphasised, creating a joint effect.

| |
|-------------|
| Cream |
| Silver grey |
| Dark brown |
| Anthracite |
| Black |



You can find more detailed information in our Accessories Brochure, which you can also view online:
www.wineo.de/en/service/downloads

UNDERLAY MATERIAL

We recommend using our silentPREMIUM or silentCOMFORT insulation mats with wineo design flooring – the ideal underlay material made from up to **90% natural raw materials** for even more comfort and optimum acoustics.

- outstanding and long-lasting impact sound qualities
- punctual conformability
- increased ease of installation
- perfect for underfloor heating

wineo silentPREMIUM insulation mat
self-adhesive



Impact sound reduction:
Up to 15 dB in the system with wineo design flooring for gluing up to utilization classes 23 and 32

wineo silentCOMFORT insulation mat
with non-slip effect



Impact sound reduction:
Up to 14 dB in the system with wineo design flooring for clicking in

ALUMINIUM PROFILES

wineo profiles are ideal for creating a neat finish between floors and walls, adjacent thresholds or other components. They form a smooth transition, close expansion gaps and are available in classic metal looks as well as in various wood designs to choose from. You can see an overview of all the available transition, adjustment and end profiles in the Accessories Brochure.

TRANSITION PROFILES



ADJUSTMENT PROFILES



END PROFILES



SERVICE

We work with distributors, architects, property developers and anyone who appreciates great floorings. That's why we offer a wide range of services. If you would like to be kept regularly up to date, just take a look at YouTube, Facebook, Twitter or Pinterest.



TECHNICAL SUPPORT

Do you have any questions about our products, where they can be used or about the installation? Do not hesitate to contact your distributor, we will be happy to help you.

MARKETING SUPPORT

We have **a wide range of samples and printed materials** to help with product presentation and sales promotion at the POS. You can get an overview of all our presentation tools, from brochures to displays, in our **“ADVERTISING WITH WINEO”** sales promotion brochure. Of course we can also coordinate with you to fulfil your **individual requirements**. Don't hesitate to get in touch!




NEWSLETTER

Stay in touch with us: it's easy to sign up for the wineo newsletter on our website. This will guarantee that you don't miss out on anything and will always be kept up to date.

COMPANY BLOG

Get some inspiration and find out even more about our products, references and events. Discover it now at:

blog.wineo.de/en

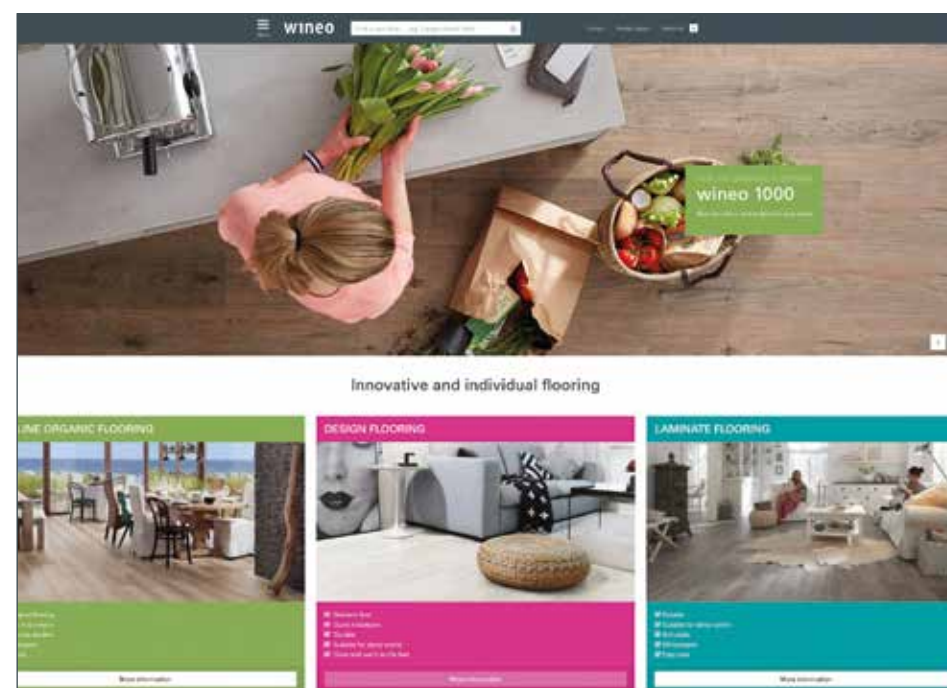

EN.WINEO.DE

- information and references as well as relevant downloads on the products
- all top references with full descriptions
- product search by characteristic, colour, format, installation height and utilization class
- find a retailer
- video portal with plenty of tips and tricks, such as installation instructions

QUALITY

wineo stands for modern quality flooring right at the heart of everyday life. We meet requirements head on and come up with great ideas. That's what makes us the ideal choice when it comes to creating a comfortable lifestyle, dealing with demanding projects and creating successful businesses. Our business focuses on quality, service and the power of innovation.

Tested quality

Since wineo flooring has to fulfil the highest requirements, it has to undergo a strict quality control process. From worldwide suppliers of raw materials right through to the finished and packaged product, our flooring is subjected to a 7-stage quality control process subject to the highest standards. This means that we can guarantee that our quality products, which have been recognised by several awards, continue to set standards in the future.

High level of responsibility


As a family business in the third generation, we have a high level of social and ecological responsibility. Consistent availability of goods, intense user and marketing support, expert advice and permanent product improvement and development are what make wineo stand out and ensure the trust and security of our market partners worldwide.

wineo



CE marking

The CE marking confirms that our product has been tested and that it meets all EU requirements in terms of safety, healthcare and environmental protection.



A+

Just like the "Blue Angel" in Germany, the A+ seal identifies our products as ecological, healthy and user friendly in the French market.



PEFC (valid for Multi-Layer)

The PEFC quality seal is based on very strict guidelines for managing our forests in a sustainable manner and guarantees that timber is used from verified cultivation sources. The entire product manufacturing process - from the raw materials through to the ready-to-use end product - is certified and verified by independent assessors.












TFI-TÜV PROFICERT

The TFI (Textiles & Flooring Institute GmbH) and TÜV Hessen evaluate products from a quality, health and ecological point of view. Essentially, products can only be certified if they present no health risk.



COLLECTION OVERVIEW

| Collection | ambra wood | | | ambra stone | | | wineo 600 wood | wineo 600 wood XL | | wineo 600 stone | | wineo 600 stone XL | | wineo 800 wood | | wineo 800 wood XL | | wineo 800 stone XL | | wineo 800 tile | | | wineo 800 craft | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|------------------|
| | Multi-Layer | | | Multi-Layer | | | | | | | | | | | | | | | | L | XL | XXL | | | |
| |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | |
| Installation type | Glue | Click | Click | Glue | Click | Click | Glue | Click | Glue | Click | Glue | Click | Glue | Click | Glue | Click | Glue | Click | Glue | Click | Glue | Glue | Glue | Glue | |
| Core board | - | - | Aqua-Protect® | - | - | Aqua-Protect® | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| Format | 1200 × 180 mm | 1212 × 185 mm | 1200 × 212 mm | 609.6 × 304.8 mm | 600 × 314 mm | 591 × 287 mm | 1200 × 180 mm | 1212 × 187 mm 1212 × 185 mm (DLC00011) | 1505 × 235 mm | 1505 × 237 mm | 609.6 × 304.8 mm | 600 × 317 mm | 900 × 450 mm | 914 × 480 mm | 1200 × 180 mm | 1212 × 185 mm | 1505 × 235 mm | 1505 × 237 mm | 914.4 × 457.2 mm | 914 × 480 mm | 457.2 × 457.2 mm | 914.4 × 457.2 mm | 914.4 × 914.4 mm | 457.2 × 457.2 mm | 914.4 × 101.6 mm |
| Product thickness | 2 mm | 4.5 mm | 9 mm | 2 mm | 4.5 mm | 9 mm | 2 mm | 5 mm | 2 mm | 5 mm | 2 mm | 5 mm | 2 mm | 5 mm | 2.5 mm | 5 mm | 2.5 mm | 5 mm | 2.5 mm | 5 mm | 2.5 mm | 2.5 mm | 2.5 mm | 2.5 mm | |
| Wear layer | 0.3 mm | 0.3 mm | 0.3 mm | 0.3 mm | 0.3 mm | 0.3 mm | 0.4 mm | 0.4 mm | 0.4 mm | 0.4 mm | 0.4 mm | 0.4 mm | 0.4 mm | 0.4 mm | 0.55 mm | 0.55 mm | 0.55 mm | 0.55 mm | 0.55 mm | 0.55 mm | 0.55 mm | 0.55 mm | 0.55 mm | 0.55 mm | |
| Planks and / or Tiles / boxes | 18/3.89 m² | 10/2.24 m² | 8/2.04 m² | 18/3.34 m² | 12/2,26 m² | 9/1.53 m² | 18/3.89 m² | 8/1.81 m² 8/1.79 m² (DLC00011) | 12/4,24 m² | 6/2,14 m² | 18/3,34 m² | 10/1,90 m² | 12/4,86 m² | 6/2,63 m² | 16/3,46 m² | 8/1,79 m² | 12/4,24 m² | 6/2,14 m² | 10/4,18 m² | 6/2,63 m² | 16/3,34 m² | 10/4,18 m² | 6/5,02 m² | 16/3,34 m² | 20/1,86 m² |
| Boxes / Pallet | 60/233.40 m² | 52/116.48 m² | 48/97.92 m² | 72/240.48 m² | 52/117,52 m² | 60/91.80 m² | 60/233.40 m² | 64/115.84 m² 64/114.56 m² (DLC00011) | 64/271,36 m² | 56/119,84 m² | 72/240,48 m² | 60/114,00 m² | 50/243,00 m² | 44/115,72 m² | 75/259,50 m² | 64/114,56 m² | 60/254,40 m² | 56/119,84 m² | 40/167,20 m² | 44/115,72 m² | 52/173,68 m² | 40/167,20 m² | 37/185,74 m² | 52/173,68 m² | 135/251,10 m² |
| Surface treatment | UV | UV | UV | UV | UV | UV | PU | PU | PU/UV | PU/UV | PU | PU | PU | PU | PU | PU | PU | PU | PU | PU | PU | PU | PU | PU | |
| Bevelled edge | - | - | - | - | - | - | - | - | - | - | - | - | - | - | ■ | ■ | ■ | ■ | - | DLC00088 – 90, 94 | | ■ | ■ | ■ | ■ |
| Real joint | - | - | - | - | - | - | - | - | - | - | - | DLC00017 DLC00018 | - | - | - | - | - | - | - | DLC00084 – 87 DLC00091,95 | | - | - | - | - |
| Utilization class EN ISO 10874 | 23/31 | 23/31 | 23/31 | 23/31 | 23/31 | 23/31 | 23/32/41 | 23/32/41 | 23/32/41 | 23/32/41 | 23/32/41 | 23/32/41 | 23/32/41 | 23/32/41 | 23/33/42 | 23/33/42 | 23/33/42 | 23/33/42 | 23/33/42 | 23/33/42 | 23/33/42 | 23/33/42 | 23/33/42 | 23/33/42 | |
| Wear behaviour in accordance with the binder content EN ISO 10582 | Type I | | | | | | | | | | | | | | | | | | | | | | | | |
| Wear resistance EN 660-2 | Group T in accordance with DIN EN 649: 2011-05 | | | | | | | | | | | | | | | | | | | | | | | | |
| Reaction to fire EN 13501-1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | B _{fl} - s1 | | |
| Anti slip category DIN 51130 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | R 9 | |
| Slip resistance EN 13893 | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | μ ≥ 0.30 - DS | |
| Anti-static properties EN 1815 | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | ≤ 2 kV | |
| Staining / Chemical resistance EN ISO 26987 | High resistance level in interdependency with concentration and application time. | | | | | | | | | | | | | | | | | | | | | | | | |
| Light fastness EN ISO 105-B02 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | |
| Residual indentation EN ISO 24343-1 | ~ 0.02 mm | ~ 0.07 mm | ~ 0.02 mm | ~ 0.02 mm | ~ 0.07 mm | ~ 0.02 mm | ~ 0.02 mm | ~ 0.07 mm | ~ 0.02 mm | ~ 0.07 mm | ~ 0.02 mm | ~ 0.07 mm | ~ 0.02 mm | ~ 0.07 mm | ~ 0.02 mm | ~ 0.07 mm | ~ 0.02 mm | ~ 0.07 mm | ~ 0.02 mm | ~ 0.07 mm | ~ 0.02 mm | ~ 0.02 mm | ~ 0.02 mm | ~ 0.02 mm | |
| Castor chair test EN 425 / ISO 4918 | Type W - no visible change | | | | | | | | | | | | | | | | | | | | | | | | |
| Suitability for underfloor heating | Suitable for all conventional hot-water-based underfloor heating systems and regulated electrical systems up to a surface temperature of 27° C. | | | | | | | | | | | | | | | | | | | | | | | | |
| Thermal resistance in (m²K)/W EN 12667 in combination with silentCOMFORT | ~ 0.01 - | ~ 0.033 ~ 0.0254 | ~ 0.06 - | ~ 0.01 - | ~ 0.033 ~ 0.0254 | ~ 0.06 - | ~ 0.01 - | ~ 0.033 ~ 0.0254 | ~ 0.01 - | ~ 0.033 ~ 0.0254 | ~ 0.01 - | ~ 0.033 ~ 0.0254 | ~ 0.01 - | ~ 0.033 ~ 0.0254 | ~ 0.01 - | ~ 0.033 ~ 0.0254 | ~ 0.01 - | ~ 0.033 ~ 0.0254 | ~ 0.01 - | ~ 0.033 ~ 0.0254 | ~ 0.01 - | ~ 0.01 - | ~ 0.01 - | ~ 0.01 - | |
| Impact sound reduction EN ISO 16251-1 in combination with silentCOMFORT | ~ 4 dB - | ~ 7 dB ~ 14 dB | ≤ 14 dB - | ~ 4 dB - | ~ 7 dB ~ 14 dB | ≤ 14 dB - | ~ 4 dB - | ~ 7 dB ~ 14 dB | ~ 4 dB - | ~ 7 dB ~ 14 dB | ~ 4 dB - | ~ 7 dB ~ 14 dB | ~ 4 dB - | ~ 7 dB ~ 14 dB | ~ 4 dB - | ~ 7 dB ~ 14 dB | ~ 4 dB - | ~ 7 dB ~ 14 dB | ~ 4 dB - | ~ 7 dB ~ 14 dB | ~ 4 dB - | ~ 4 dB - | ~ 4 dB - | ~ 4 dB - | |
| Dimensional stability EN ISO 23999 | ~ 0.15 % | ~ 0.1 % | - | ~ 0.15 % | ~ 0.1 % | - | ~ 0.15 % | ~ 0.1 % | ~ 0.15 % | ~ 0.1 % | ~ 0.15 % | ~ 0.1 % | ~ 0.15 % | ~ 0.1 % | ~ 0.15 % | ~ 0.1 % | ~ 0.15 % | ~ 0.1 % | ~ 0.15 % | ~ 0.1 % | ~ 0.15 % | ~ 0.15 % | ~ 0.15 % | ~ 0.15 % | |
| Guarantee for private use according to Windmüller warranty conditions | 15 years | 15 years | 15 years | 15 years | 15 years | 15 years | 20 years | 20 years | 20 years | 20 years | 20 years | 20 years | 20 years | 20 years | 25 years | 25 years | 25 years | 25 years | 25 years | 25 years | 25 years | 25 years | 25 Years | 25 years | |
| Designs | 16 | | | 6 | | | 14 | | 10 | | 4 | | 4 | | 9 | | 9 | | 10 | | 8 | | 2 | | 4 |
| Page | 22 | | | 24 | | | 30 | | 32 | | 34 | | 36 | | 44 – 47 | | 44 – 47 | | 50 | | 52 | | 54 | | |

Alle decors shown in this brochure are reproductions. windmüller flooring products WFP GmbH provides no guarantee with regard to mistakes, printing errors and technical changes.

SYMBOLS

INSTALLATION TYPE



Glue (Dryback)



Click (Connect locking system)



Click (LocTec® locking system)

PRODUCT FEATURES



Resistance to staining



Suitability for chair castors



Suitability for underfloor heating



Suitability for damp areas



Bevelled edge



Real joint



PU surface coating



UV surface coating



Insulation mat Sound-Protect Eco

UTILIZATION CLASSES



Utilization class 23:
Heavy-duty use in the domestic area



Utilization class 31:
Medium use in the commercial sector



Utilization class 32:
Normal use in the commercial sector



Utilization class 33:
Heavy-duty use in the commercial sector



Utilization class 41:
Medium use in the light industrial sector (vehicular traffic excluded)



Utilization class 42:
Normal use in the light industrial sector

GUARANTEE



15 year guarantee (for private application)



20 year guarantee (for private application)



25 year guarantee (for private application)

windmüller flooring products WFP GmbH

Nord-West-Ring 21

D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0

Fax: +49 (0) 52 37 609 - 309

info@wineo.de

www.wineo.de

Presented by:

Art. no. 20090846 | 06/2017

wineo