

SERVICE

WE ARE HAPPY TO HELP YOU

Your local contact

Are you interested in our floors or do you have any other questions? Our retail partners are happy to help you in your area.

Or log onto our partner portal at www.wineo.de. Here, you can use your personal access to find plenty of information and all the new features relating to our floor coverings.

Technical support

Do you have technical questions about our products or about their installation? Our competent technical team is happy to help you. Simply contact our installation hotline on +49 (0) 52 37 609-530.

Delivery service

Your satisfaction is our aim. Therefore all products are available from stock and can thus be delivered to you as soon as possible. Trust us!

We look forward to seeing you.



Visit us on the Internet

At www.wineo.de you can find all the information about us and our brands. From the product portfolio to new products and technical information, our Internet platform provides you with everything you are looking for.

OUR WEB HIGHLIGHTS:

■ The showroom

Our floors in their new environment

■ The floor studio

Plan different floor coverings in different room situations


■ The floor planner

All the relevant details about various floors at a glance

■ The dealer search

Simply enter the postcode to find a dealer

www.wineo.de

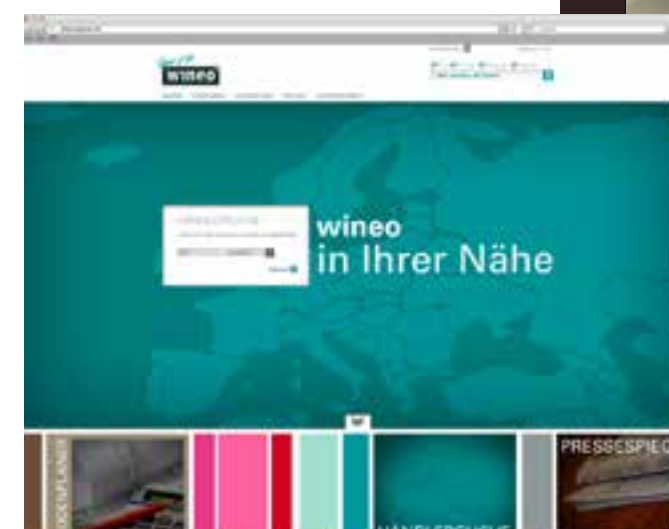

windmüller flooring products GmbH
Nord-West-Ring 21
D-32832 Augustdorf
Tel.: +49 (0) 52 37 609-0
Fax: +49 (0) 52 37 609-309
Mail: info@wineo.de
www.wineo.de

Handed over by:

Product no. 20080762 | As at 02/2014

Stage of life

wineo®



DESIGN FLOORING

Stage of life
wineo®



My workplace



CONTENTS

The wineo® philosophy	4
wineo® Design floors	6
Product composition	8
Installation types	10
Surfaces	12
Product benefits	14
Quality promise and awards	16
Application areas, living room	18
Application areas, commercial	20
Overview of collections	22

★	AMBRA	DESIGNline® I Multi-Layer	24
★	LAGUNA	DESIGNline CONNECT®	32
★★	KINGSIZE	DESIGNline® I DESIGNline CONNECT®	36
★★	BACANA	DESIGNline CONNECT®	38
★★	SELECT	DESIGNline®	42
★★★	PRESTIGE	DESIGNline®	48

Accessories	52
Symbols explanation	54
Collection overview to fold out	55
Service	58



The stage of life

*I like to get carried away by my
ideas and plans – what's the
point of our imagination if
it isn't allowed to accompany us
all the way from time to time?
I don't want to take off though:
because only those who remain
on the ground have both feet
firmly planted in life.*

wineo®

Home is where you like to feel good all round. Not only does this include the ideal four walls and nice furnishings: the genuine at-home feeling also includes the floor covering that fits your lifestyle and provides the perfect base for everyday life. Reliable and safe.

We call that "Stage of life" – and that is exactly what wineo® stands for: the right floor for the individual at-home feeling, lively, creative and, at the same time, highly functional. wineo® is your personal partner for high-quality flooring that knows about life and its demands, and is so nice that you are happy for it to move in.

Let yourself be inspired ...

Stage of life

WINEO® DESIGN FLOORS SIMPLY THE PERFECT CHOICE

Simply the perfect choice whether for widely used public areas or rooms in the home: the elastic design floors from wineo® are very versatile and at the same time wonderfully uncomplicated. In addition, not only are they impressive in terms of functionality, they are also genuine eye-catchers. The different wood and stone textures, from exotic to sophisticated or modern, look authentic and ensure the perfect ambience. Exactly the way your customers like it.

The wineo® design floors are ...

... extremely durable.

The floor coverings are simply good for every activity: they like to be walked on by lots of feet and also make a great partner for playing on. Heavy-duty use is no problem thanks to the textured surface.

... quiet, warm and gentle on the joints.

Due to their elastic surface, the floors are kind on the joints, insulate footfall noise and, at the same time, feel wonderfully warm to the feet.

... suitable for gluing and clicking together.

Where necessary, the planks that make up our design floors can easily be glued. Installation is even simpler with our patented Connect locking system or the LocTec® click-in connection.

... quick to install.

Connect or LocTec® – clicking is the alternative to gluing: our design floors are quick to install, whilst handling them is simple and neat – it just doesn't get any easier.

... low in terms of construction height.

Thanks to their minimal construction height of 2 to 9 mm, the floor coverings, both in the click-in and glued versions, are the ideal solutions for renovation work, even over night.



ONE SURFACE THREE PRODUCT COMPOSITIONS

Different spaces require different solutions, especially when it involves the perfect floor covering. wineo® design floors are distinguished by their innovative composition and the flexible ways they can be used. You have the choice of three versions:

DESIGNline® flooring to glue:

100% elastic design flooring for gluing as planks or tiles

DESIGNline CONNECT® flooring with Connect technology:


100% elastic design flooring for clicking in as planks or tiles

Multi-Layer with LocTec® technology:


Design flooring surface on HDF Aqua Protect® core board for clicking in as planks or tiles




Product composition of design flooring for clicking in with Connect

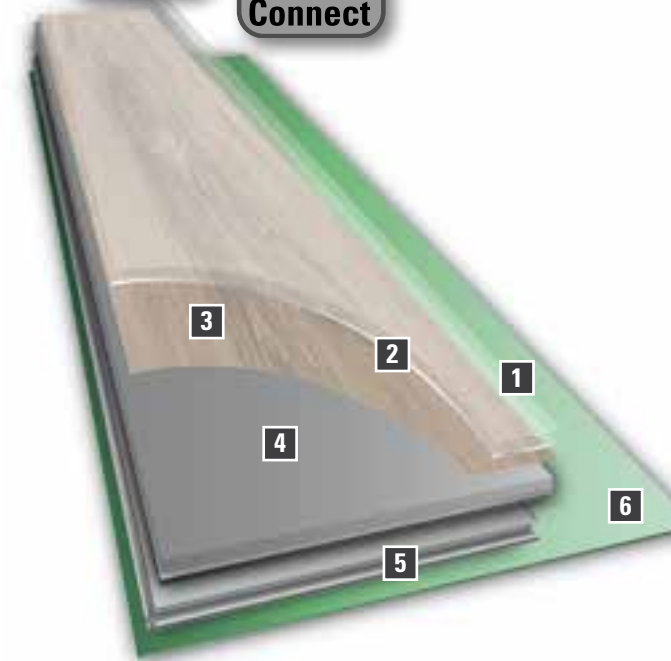


- 1 PU sealant:** protects the product and enables easy cleaning and care
- 2 Wear layer:** guarantees very high durability and is the basis for the classification in the corresponding application areas
- 3 Decor film:** gives the product a unique design
- 4 Base layer with glass fibre reinforcement:** gives the product high dimensional stability, inner strength and optimal indentation behaviour
- 5 Backing:** compensates for tension on the back of the construction
- 6 silentCOMFORT underlay mat:** bridges uneven patches and optimises the impact and footfall noise values

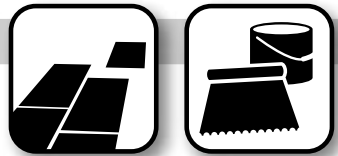


Product composition of design flooring for gluing

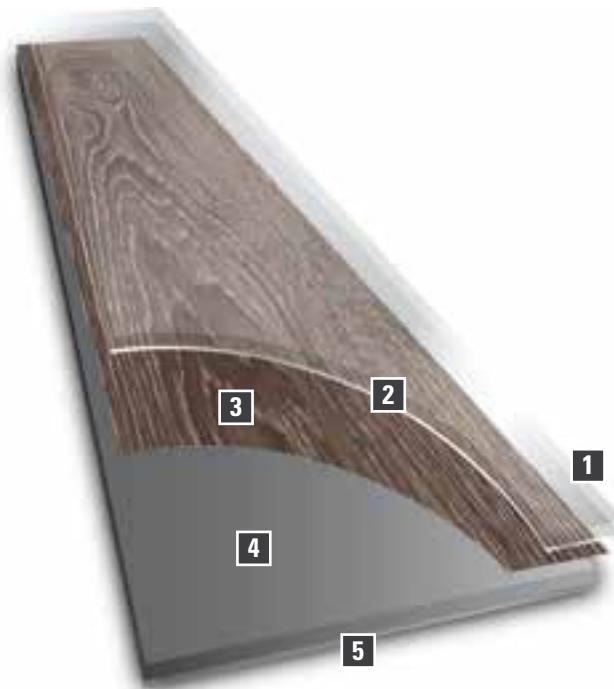

- 1 PU sealant:** protects the product and enables easy cleaning and care
- 2 Wear layer:** guarantees very high durability and is the basis for the classification in the corresponding application areas
- 3 Decor film:** gives the product a unique design
- 4 Base layer:** provides elasticity and stability
- 5 Backing:** helps with balance and optimal installation due to waffle backing texture

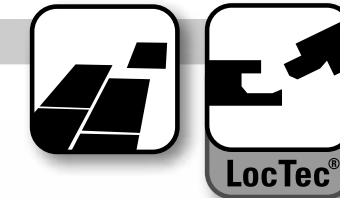

Product composition of Multi-Layer for clicking in with LocTec®

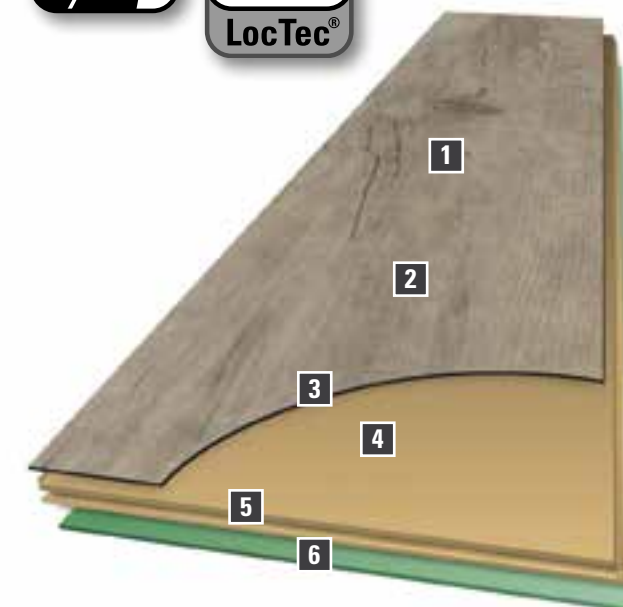

- 1 PU sealant:** protects the product and enables easy cleaning and care
- 2 Wear layer:** guarantees very high durability and is the basis for the classification in the corresponding application areas
- 3 Decor film:** gives the product a unique design
- 4 Core board:** HDF-Aqua-Protect®
- 5 LocTec®:** the Unilin® connection system, tried and tested a million times
- 6 Sound-Protect Eco:** the optimal acoustic system pre-installed by wineo®

GLUING OR CLICKING ALWAYS DONE QUICKLY

Where a sturdy floor with a low construction height for gluing is called for, our design flooring is happy to oblige. There is a choice of seven collections with 82 attractive wood and stone decors.

When it comes to quick click-in technology, you can decide between two systems: the Connect and the LocTec® technology. They include 4 collections with numerous wood, stone and fantasy decors.

Detailed instructions on how to correctly install them can be found on our website:

www.wineo.de



OUR DESIGN FLOORING FOR GLUING




You can use the glued floor covering any place where attractive design, high functionality and the ultimate durability are required. All the collections can be quickly and neatly installed. Thanks to the low construction height of max. 2.5 mm, the flooring is ideally suited for renovation work.

OUR DESIGN FLOORING FOR CLICKING IN

Even our collections featuring the Connect locking system are quick and easy to install. They only need a craft knife and a white rubber mallet. Due to the low construction height of just 5 mm, the click-in connection is perfectly suitable for renovations.

You can handle the collections featuring the LocTec® locking system just like a laminate floor made of wood. The construction height here is 9 mm. All you need to install it is a saw. The perfect solution for larger uneven areas in the substrate.



The Connect click-in connection:
for design floors



The LocTec® click-in connection:
for design floors applied to HDF core boards

SURFACES

VARIETY OF TEXTURES

wineo® design flooring comes in a range of surfaces which are individually tailored to the effects themselves.

The embossed stone and wood structures appear highly realistic.

Information about each surface can be found below the illustrations on the collection pages.

fine wood structure



rough wood structure



exclusive wood structure



sand structure



stone structure



embossed in registration



slate structure



high-gloss surface



Travertine



THE BENEFITS OF WINEO® DESIGN FLOORING




SUITABLE FOR DAMP AREAS

The design flooring also shows its best side in damp areas, such as the kitchen or bathroom.



DURABLE

Our elastic design flooring is tough, even under heavy-duty use.



WATER-RESISTANT

If something is spilled, it does not bother our design flooring at all. It can easily be wiped with a wet cloth.



NON-SLIP

With its sophisticated surface textures, the floor covering does not allow any slip-ups.



ANTI-STATIC

Thanks to its anti-static surface, dust does not stick and problems caused by electronic appliances are excluded.



SUITABLE FOR UNDER-FLOOR HEATING

Extra warm to the feet. No problem for wineo® design floors. The low thermal resistance saves energy costs and ensures warm feet.

QUALITY

All products that bear the wineo® name must meet the highest requirements. We can only manage this with an outstanding team, e.g. the carefully selected, responsible raw material suppliers, a reliable delivery service in all respects and our professional service team. The sales team in both the office and the field is occupied by highly competent employees, who exercise their job with plenty of commitment and passion. We are also proud of our strong research and development department, which repeatedly comes up with high-quality new developments.

Controlled quality

In order to guarantee the high calibre of our products, we set ourselves the highest quality standards. From the first step of the manufacturing process onwards, we carry out continuous quality checks. Both our own processes and those of other companies who work with us, are permanently checked and, in addition, continually developed. For the safety of the retail and trade sectors, we also naturally ensure that all the products meet the building regulations.

Numerous technical certifications constitute the visible evidence of our quality standards. So that you can rely on them.

KINGSIZE | Western Oak
... E15002 ...

AWARD WINNING

The wineo® design floors are distinguished by a high level of quality, which relates to both their material properties and to the service surrounding our customers. The general DIBt building regulations approval is an independent, annual quality check. All wineo® products come with this quality seal and in addition go through an internal quality check at the Augustdorf production site. This is how we ensure consistent quality that is proven by the following certificates:



Information représentative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)



Schadstoffgeprüft
Emissionsgeprüft





KINGSIZE | Native Oak
... E15001 ...



BACANA stars | Antarctica
CSW3230BA

*A reason to
feel good*

Living room

Are your customers looking for a floor covering that looks fabulous, but can also withstand the little ones playing Cowboys and Indians, wet paws or an accidental shower? A wineo® design floor can do all that and much more besides. Discover the variety of floors for living rooms, kitchens and bathrooms, so that you can recommend them to others. Because whatever your customers are looking for, a wineo® design floor provides the right flooring solution for every demand.

- **Easy care:** particularly easy to clean and look after, due to resistant surface textures and PU treatment
- **Large choice of decors:** different surfaces and designs from trendy to classic, for every taste
- **Individually created:** decors designed according to your customers' own ideas

Living room

BACANA stars | Calma Sand
CCA7010BA

*Style that with-
stands a lot*

Contract

Where a lot of people come together, e.g. in the catering and hotel sector, in shopfitting or at airports, the floors must be particularly resistant, yet attractive. wineo® design floor coverings are the ideal choice for your customers and large buildings. It is little wonder that they are in fact extremely robust and durable and, thanks to their diverse wear classes, fulfil their purpose wherever they are installed.













■ **Durable:** even under heavy-duty use due to the wear layer of 0.55 mm and 0.7 mm and resistant surface textures

■ **Highly functional:** very long-lasting, easy to clean and look after, quick to install, also perfect for renovation work

■ **Attractive designs:** trendy decors and authentic looking finishes for every application

Contract

OVERVIEW OF COLLECTIONS

QUALITY	DESIGNS	FORMATS	CHARACTERISTICS	PRODUCT THICKNESS	INSTALLATION TYPE	RECOMMENDED USE	GUARANTEE
AMBRA DESIGNline® (Page 24)		16 wood decors 6 stone decors	1200×180 mm 609.6×304.8 mm				
Multi-Layer (Page 24)		16 Multi-Layer wood decors 6 Multi-Layer stone decors	1204×216 mm 595×291 mm	2 mm 2 mm			
round edge (Page 30)		8 round edge wood decors	1200×180 mm	9 mm 9 mm			
			Round edge technology	2.5 mm			
LAGUNA DESIGNline CONNECT® (Page 32)		12 wood decors 6 stone decors	1212×185 mm 600×312 mm			Home	15 years home
			Bevelled edge, real joint	5 mm 5 mm			
KINGSIZE DESIGNline® DESIGNline CONNECT® (Page 36)		12 wood decors	1505×235 mm			Home and commercial	15 years and 20 years home
			Bevelled edge	2.5 mm and 5 mm			
BACANA DESIGNline CONNECT® (Page 38)		12 wood decors 10 stone decors	1212×85 mm 914×473 mm			Commercial	20 years home
			Bevelled edge, real joint	5 mm 5 mm			
SELECT DESIGNline® (Page 42)		18 wood decors 12 stone decors	1200×180 mm 900×450 mm			Home and commercial	20 years home
			Bevelled edge	2.5 mm 2.5 mm			
PRESTIGE DESIGNline® (Page 48)		14 wood decors	914.4×152.4 mm 1200×180 mm			Commercial	25 years home
			Bevelled edge	2.5 mm 2.5 mm			

You can see all the collections and decors in the floor studio on our website, installed as an area in home situations:

www.wineo.de





AMBRA wood

16 modern wood decors



Lohas Light
1 strip | rough wood structure
DESIGNline® to glue: DPI73212AMW | 1200×180 mm
Multi-Layer to click in: MLPI73212AMW | 1204×216 mm
Skirting board 1: 30060380



Arizona Oak Grey
1 strip | rough wood structure
DESIGNline® to glue: DEI25114AMW | 1200×180 mm
Multi-Layer to click in: MLEI25114AMW | 1204×216 mm
Skirting board 1: 30060365



Long Island
1 strip | rough wood structure
DESIGNline® to glue: DPI101113AMW | 1200×180 mm
Multi-Layer to click in: MLPI101113AMW | 1204×216 mm
Skirting board 1: 30060362



Lohas Greige
1 strip | rough wood structure
DESIGNline® to glue: DPI73217AMW | 1200×180 mm
Multi-Layer to click in: MLPI73217AMW | 1204×216 mm
Skirting board 1: 30060381



Arizona Oak Lightgrey
1 strip | rough wood structure
DESIGNline® to glue: DEI25418AMW | 1200×180 mm
Multi-Layer to click in: MLEI25418AMW | 1204×216 mm
Skirting board 1: 30060366



Boston Pine Grey
1 strip | rough wood structure
DESIGNline® to glue: DPI71713AMW | 1200×180 mm
Multi-Layer to click in: MLPI71713AMW | 1204×216 mm
Skirting board 1: 30060377



Highlands Light
1 strip | fine wood structure
DESIGNline® to glue: DEI75213AMW | 1200×180 mm
Multi-Layer to click in: MLEI75213AMW | 1204×216 mm
Skirting board 1: 30060383



Golden Canadian Oak
1 strip | rough wood structure
DESIGNline® to glue: DEI54612AMW | 1200×180 mm
Multi-Layer to click in: MLEI54612AMW | 1204×216 mm
Skirting board 1: 30060371



Wild Apple
1 strip | rough wood structure
DESIGNline® to glue: DAP61413AMW | 1200×180 mm
Multi-Layer to click in: MLAP61413AMW | 1204×216 mm
Skirting board 1: 30060374



Boston Pine Cream
1 strip | rough wood structure
DESIGNline® to glue: DPI71717AMW | 1200×180 mm
Multi-Layer to click in: MLPI71717AMW | 1204×216 mm
Skirting board 1: 30060379




Grey Canadian Oak
1 strip | rough wood structure
DESIGNline® to glue: DEI54615AMW | 1200×180 mm
Multi-Layer to click in: MLEI54615AMW | 1204×216 mm
Skirting board 1: 30060372



Natural Apple
1 strip | rough wood structure
DESIGNline® to glue: DAP61416AMW | 1200×180 mm
Multi-Layer to click in: MLAP61416AMW | 1204×216 mm
Skirting board 1: 30060302

Technical information DESIGNline® to glue		Technical information Multi-Layer to click in	
Plank size:	1200 × 180 mm	Plank size:	1204 × 216 mm
Packaging unit:	3.89 m²/box	Packaging unit:	2.08 m²/box
Thickness:	2.0 mm	Thickness:	9.0 mm
Wear layer:	0.3 mm	Wear layer:	0.3 mm

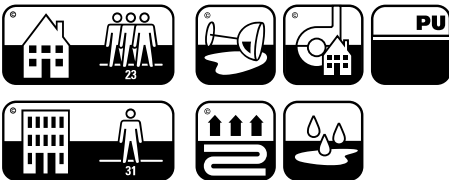

matching skirting board **1**

AMBRA

AMBRA wood

16 modern wood decors



Indian Oak
1 strip | rough wood structure
DESIGNline® to glue: DEI55413AMW | 1200 × 180 mm
Multi-Layer to click in: MLEI55413AMW | 1204 × 216 mm
Skirting board 1: 30060339



Highlands Dark
1 strip | fine wood structure
DESIGNline® to glue: DEI75212AMW | 1200 × 180 mm
Multi-Layer to click in: MLEI75212AMW | 1204 × 216 mm
Skirting board 1: 30060382





Boston Pine Brown
1 strip | rough wood structure
DESIGNline® to glue: DPI71716AMW | 1200 × 180 mm
Multi-Layer to click in: MLPI71716AMW | 1204 × 216 mm
Skirting board 1: 30060378



Bretagne Oak
1 strip | rough wood structure
DESIGNline® to glue: DEI63614AMW | 1200 × 180 mm
Multi-Layer to click in: MLEI63614AMW | 1204 × 216 mm
Skirting board 1: 30060376

Technical information DESIGNline® to glue		Technical information Multi-Layer to click in	
Plank size:	1200 × 180 mm	Plank size:	1204 × 216 mm
Packaging unit:	3.89 m²/box	Packaging unit:	2.08 m²/box
Thickness:	2.0 mm	Thickness:	9.0 mm
Wear layer:	0.3 mm	Wear layer:	0.3 mm

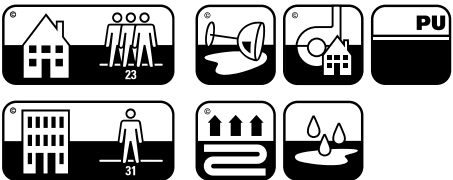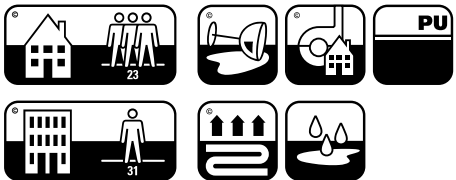

AMBRA wood | Indian Oak
... 55413AMW

AMBRA stone

6 authentic stone decors



Sienna
Travertine
DESIGNline® to glue: DS21106AMS | 609.6×304.8 mm
Multi-Layer to click in: MLS21106AMS | 595×291 mm
Skirting board 1: 30060363



Monza
Travertine
DESIGNline® to glue: DM35811AMS | 609.6×304.8 mm
Multi-Layer to click in: MLM35811AMS | 595×291 mm
Skirting board 1: 30060369



Berlin Night
sand structure
DESIGNline® to glue: DBN28412AMS | 609.6×304.8 mm
Multi-Layer to click in: MLBN28412AMS | 595×291 mm
Skirting board 1: 30060368



Harlem
sand structure
DESIGNline® to glue: DH50515AMS | 609.6×304.8 mm
Multi-Layer to click in: MLH50515AMS | 595×291 mm
Skirting board 1: 30060370





Berlin Day
sand structure
DESIGNline® to glue: DBD284112AMS | 609.6×304.8 mm
Multi-Layer to click in: MLBD284112AMS | 595×291 mm
Skirting board 1: 30060367





Dakar
slate structure
DESIGNline® to glue: DD21833AMS | 609.6×304.8 mm
Multi-Layer to click in: MLD21833AMS | 595×291 mm
Skirting board 1: 30030364

Technical information DESIGNline® to glue




Tile size:	609.6 × 304.8mm
Packaging unit:	3.34 m²/box
Thickness:	2.0 mm
Wear layer:	0.3 mm

Technical information Multi-Layer to click in



Tile size:	595 × 291 mm
Packaging unit:	1.56 m²/box
Thickness:	9.0 mm
Wear layer:	0.3 mm

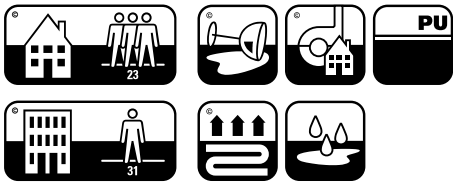

AMBRA stone | Berlin Day
... 284112AMS



AMBRA round edge 8 modern trend decors



Alba Oak Snow | DEI2336RE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060307



Alba Oak Siena | DEI2333RE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060306



Boston Cherry | DKB1472RE | 1200 × 180 mm
1 strip | exclusive wood structure
Skirting board 1: 30060318



Everglade Oak | DEI3377RE | 1200 × 180 mm
1 strip | exclusive wood structure
Skirting board 1: 30060317



Alba Oak Cream | DEI2332RE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060305




Alba Oak Cottage | DEI2337RE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060308



Dark Oak | DEI3332RE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060316



Dark Pine | DK16203RE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060322

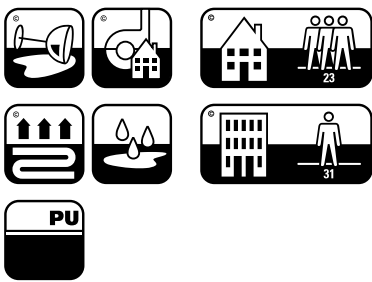

Technical information

Plank size:	1200 × 180 mm
Packaging unit:	3.24 m²/box
Thickness:	2.5 mm
Wear layer:	0.3 mm



matching skirting board **1**

AMBRA



LAGUNA wood

12 wonderful wood decors



Alba Oak Snow | CEI2336LA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060307



Victoria Maple | CAH2131LA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060300



Alba Oak Cottage | CEI2337LA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060308



Boston Cherry | CKB1472LA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060318



Dark Oak | CEI3332LA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060316



Dark Pine | CKI6203LA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060322



Alba Oak Cream | CEI2332LA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060305



Alba Oak Siena | CEI2333LA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060306



Hamilton Beech | CBU2431LA | 1212 × 185 mm
2 strips | fine wood structure
Skirting board 1: 30060303




Mexican Walnut | CNU2424LA | 1212 × 185 mm
2 strips | rough wood structure
Skirting board 1: 30060347



Everglade Oak | CEI3377LA | 1212 × 185 mm
1 strip | exclusive wood structure
Skirting board 1: 30060317



Black Oak | CEI2441LA | 1212 × 185 mm
2 strips | exclusive wood structure
Skirting board 1: 30060309

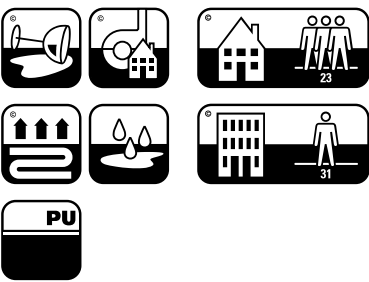

Technical information

Plank size:	1212 × 185 mm
Packaging unit:	1.793 m²/box
Thickness:	5.0 mm
Wear layer:	0.3 mm



matching skirting board **1**

LAGUNA

LAGUNA stars 6 authentic stone designs with real joint technology



Alaska Slate | CSC5101LA | 600 × 312 mm
slate structure




Desert Travertine | CTR2521LA | 600 × 312 mm
sand structure



Silver Slate | CSC7012LA | 600 x 312 mm
slate structure




Polar Travertine | CTR2530LA | 600 × 312 mm
sand structure

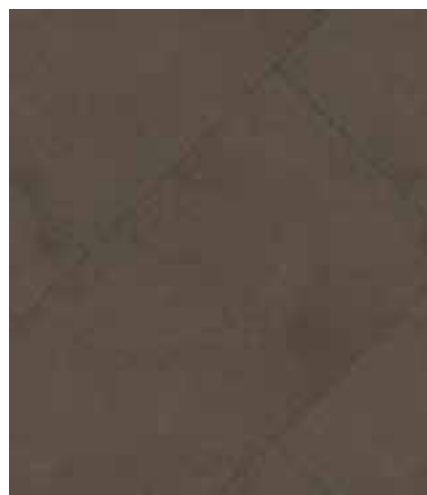

Navajo Mocca | CNA2041LA | 600 x 312 mm
sand structure



Dark Slate | CSC7011LA | 600 x 312 mm
slate structure

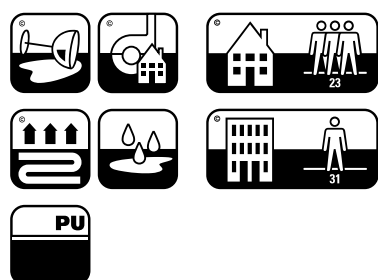

Technical information

Tile size:	600 × 312 mm
Packaging unit:	1.872 m ² /box
Thickness:	5.0 mm
Wear layer:	0.3 mm



LAGUNA stars | Alaska Slate
CSC5101LA



KINGSIZE

12 trend decors with the unique XL plank size



Alaska Oak | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI2308AMKS (0.3 mm) | DEI2308SEKS (0.55 mm)
To click in: CEI2308LA (0.3 mm) | CEI2308BA (0.55 mm)
Skirting board 1: 30060348



Vintage Cream | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI1716AMKS (0.3 mm) | DEI1716SEKS (0.55 mm)
To click in: CEI1716LA (0.3 mm) | CEI1716BA (0.55 mm)
Skirting board 1: 30060349



Western Oak | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI5002AMKS (0.3 mm) | DEI5002SEKS (0.55 mm)
To click in: CEI5002LA (0.3 mm) | CEI5002BA (0.55 mm)
Skirting board 1: 30060353



Native Oak | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI5001AMKS (0.3 mm) | DEI5001SEKS (0.55 mm)
To click in: CEI5001LA (0.3 mm) | CEI5001BA (0.55 mm)
Skirting board 1: 30060350



Vintage Desert | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI1715AMKS (0.3 mm) | DEI1715SEKS (0.55 mm)
To click in: CEI1715LA (0.3 mm) | CEI1715BA (0.55 mm)
Skirting board 1: 30060351



Royal Oak | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI5003AMKS (0.3 mm) | DEI5003SEKS (0.55 mm)
To click in: CEI5003LA (0.3 mm) | CEI5003BA (0.55 mm)
Skirting board 1: 30060354



Fashion Oak | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI2309AMKS (0.3 mm) | DEI2309SEKS (0.55 mm)
To click in: CEI2309LA (0.3 mm) | CEI2309BA (0.55 mm)
Skirting board 1: 30060352



Denim Oak | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI2312AMKS (0.3 mm) | DEI2312SEKS (0.55 mm)
To click in: CEI2312LA (0.3 mm) | CEI2312BA (0.55 mm)
Skirting board 1: 30060356



Mystic Oak | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI5005AMKS (0.3 mm) | DEI5005SEKS (0.55 mm)
To click in: CEI5005LA (0.3 mm) | CEI5005BA (0.55 mm)
Skirting board 1: 30060358



Country Oak | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI5004AMKS (0.3 mm) | DEI5004SEKS (0.55 mm)
To click in: CEI5004LA (0.3 mm) | CEI5004BA (0.55 mm)
Skirting board 1: 30060355



Vintage Antique | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI1718AMKS (0.3 mm) | DEI1718SEKS (0.55 mm)
To click in: CEI1718LA (0.3 mm) | CEI1718BA (0.55 mm)
Skirting board 1: 30060357



Vintage Mocca | 1505 × 235 mm
1 strip | rough wood structure
To glue: DEI1714AMKS (0.3 mm) | DEI1714SEKS (0.55 mm)
To click in: CEI1714LA (0.3 mm) | CEI1714BA (0.55 mm)
Skirting board 1: 30060359

Technical information DESIGNline® to glue		Technical information DESIGNline CONNECT® to click in	
Plank size:	1505 × 235 mm	Plank size:	1505 × 235 mm
Packaging unit:	2.122 m²/box	Packaging unit:	2.122 m²/box
Thickness:	2.5 mm	Thickness:	5 mm
Wear layer:	0.3 mm 0.55 mm	Wear layer:	0.3 mm 0.55 mm

Wear layer 0.3 mm:

Wear layer 0.55 mm:

matching skirting board **1**

KINGSIZE



BACANA wood

12 modern wood decors



White Pine | CKI3348BA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060321



Country Pine | CKI6206BA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060323



Golden Apple | CAP6051BA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060302



Exotic Peach | CPF7005BA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060346



Honey Oak | CEI2672BA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060310



Alabama Tree
3 strips | fine wood structure
CEI2986BA | 1212 × 185 mm
Skirting board 1: 30060311



Miami Vice | CEI2991BA | 1212 × 185 mm
2 strips | rough wood structure
Skirting board 1: 30060312



New York Loft | CEI2992BA | 1212 × 185 mm
2 strips | rough wood structure
Skirting board 1: 30060313



Scandinavian Pine | CKI1113BA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060320




Indian Summer | CEI2993BA | 1212 × 185 mm
2 strips | rough wood structure
Skirting board 1: 30060314



Classic Walnut | CNU3116BA | 1212 × 185 mm
1 strip | rough wood structure
Skirting board 1: 30060325



Tokyo Night | CEI2996BA | 1212 × 185 mm
2 strips | rough wood structure
Skirting board 1: 30060315

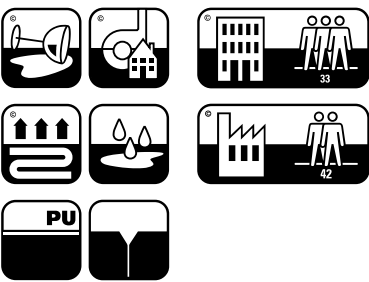

Technical information

Plank size:	1212 × 185 mm
Packaging unit:	1.793 m²/box
Thickness:	5.0 mm
Wear layer:	0.55 mm



matching skirting board **1**

BACANA

BACANA stars



Antarctica | CSW3230BA | 914 × 473 mm
stone structure



Calma Sand | CCA7010BA | 914 × 473 mm
stone structure



Heavy Metal | CBE6102BA | 914 × 473 mm
high-gloss surface



Manhattan | CME6000BA | 914 × 473 mm
brushed structure



Navajo Rock | CNA2016BA | 914 × 473 mm
stone structure



Iceland | CPA2694BA | 914 x 473 mm
rough wood structure



Art Concrete | CBE7014BA | 914 x 473 mm
sand structure




Silver Fiber | CFA1904BA | 914 × 473 mm
stone structure



Calma Ferrum | CCA7008BA | 914 × 473 mm
sand structure



Havanna | CHB2113BA | 914 x 473 mm
rough wood structure

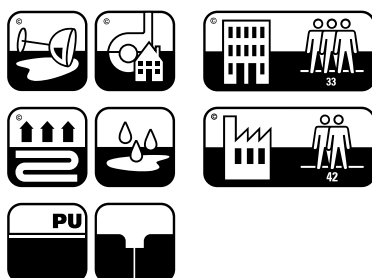

Technical information

Tile size:	914 × 473 mm
Packaging unit:	2.594 m ² /box
Thickness:	5.0 mm
Wear layer:	0.55 mm





SELECT wood

18 selected wood designs for commercial applications



Iceland | DPA2694SE | 1200 × 180 mm
1 strip | rough wood structure



Washed Pine | DK18007SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060342



Country Pine | DK16206SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060323



Alba Oak Siena | DE12333SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060306



Alba Oak Cottage | DE12337SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060308



Scandinavian Pine | DK11113SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060320



Alba Oak Snow | DE12336SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060307



Alba Oak Cream | DE12332SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060305



Diamond | DH18201SE | 1200 × 180 mm
1 strip | rough wood structure




Gunstock Oak | DE13325SE | 1200 × 180 mm
1 strip | rough wood structure



Golden Apple | DAP6051SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060302



Exotic Peach | DPF7005SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060346

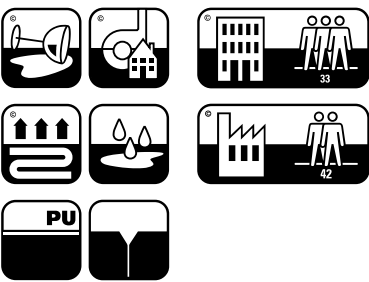

Technical information

Plank size:	1200 × 180 mm
Packaging unit:	3.24 m²/box
Thickness:	2.5 mm
Wear layer:	0.55 mm



matching skirting board **1**



SELECT

SELECT wood

18 selected wood designs for commercial applications



Cherry Select | DKB6032SE | 1200 × 180 mm
1 strip | rough wood structure



Classic Walnut | DNU3116SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060325



Dark Pine | DK16203SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060322




Havanna | DHB2113SE | 1200 × 180 mm
1 strip | rough wood structure



Dark Oak | DEI3332SE | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060316



Everglade Oak | DEI3377SE | 1200 × 180 mm
1 strip | exclusive wood structure
Skirting board 1: 30060317

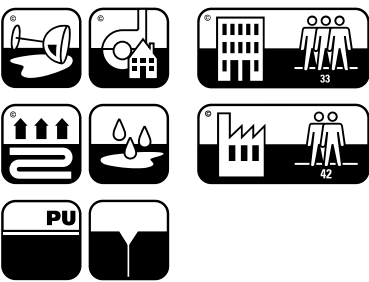

Technical information

Plank size:	1200 × 180 mm
Packaging unit:	3.24 m ² /box
Thickness:	2.5 mm
Wear layer:	0.55 mm



SELECT wood | Everglade Oak
DEI3377SE



SELECT stone

12 elegant stone designs for commercial application



Antarctica | DSW3230NO | 900 × 450 mm
stone structure



Italian Travertine | DTR7018NO | 900 × 450 mm
sand structure



Calma Titan | DCA7007NO | 900 × 450 mm
sand structure



Heavy Metal | DBE6102NO | 900 × 450 mm
high-gloss surface



Calma Ferrum | DCA7008NO | 900 × 450 mm
sand structure



Calma Carbon | DCA7009NO | 900 × 450 mm
sand structure



Natural Concrete | DBE2038NO | 900 × 450 mm
sand structure



Art Concrete | DBE7014NO | 900 × 450 mm
sand structure



Modern Concrete | DBE3803NO | 900 × 450 mm
sand structure




Silver Fiber | DFA1904NO | 900 × 450 mm
stone structure



Silver Slate | DSC7012NO | 900 × 450 mm
slate structure



Dark Slate | DSC7011NO | 900 × 450 mm
slate structure

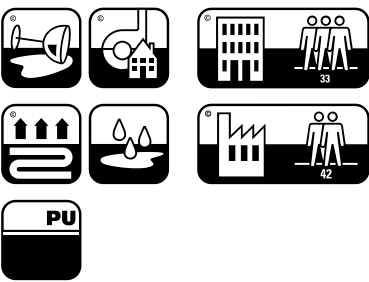

Technical information

Tile size:	900 × 450 mm
Packaging unit:	4.05 m ² /box
Thickness:	2.5 mm
Wear layer:	0.55 mm



SELECT

PRESTIGE 4 embossed in registration for an authentic surface texture



Diamond | DHI8201PO | 914.4 × 152.4 mm
1 strip | embossed in registration




Cognac | DHI8203PO | 914.4 × 152.4 mm
1 strip | embossed in registration



Melange | DHI8202PO | 914.4 × 152.4 mm
1 strip | embossed in registration



Tobacco | DHI8204PO | 914.4 × 152.4 mm
1 strip | embossed in registration

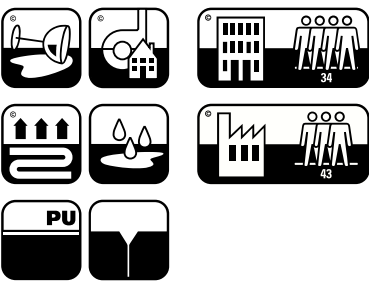

Technical information

Plank size:	914.4 × 152.4 mm
Packaging unit:	3.34 m²/box
Thickness:	2.5 mm
Wear layer:	0.7 mm



PRESTIGE / Antique Cedar
DLE3312PA



PRESTIGE

10 rustic wood designs for the most demanding applications



White Pine | DK13348PA | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060321



Antique Oak | DE13343PA | 1200 × 180 mm
1 strip | rough wood structure



Farmer's Oak | DE13306PA | 1200 × 180 mm
1 strip | rough wood structure



Century Oak | DE16301PA | 1200 × 180 mm
1 strip | rough wood structure



Portuguese Pine | DK19024PA | 1200 × 180 mm
1 strip | rough wood structure



Country Pine | DK16206PA | 1200 × 180 mm
1 strip | rough wood structure
Skirting board 1: 30060323



Rustic Pine | DK19003PA | 1200 × 180 mm
1 strip | rough wood structure




Rainbow Cedar | DZE3310PA | 1200 × 180 mm
1 strip | rough wood structure



Hickory | DH13308PA | 1200 × 180 mm
1 strip | rough wood structure



Antique Cedar | DLE3312PA | 1200 × 180 mm
1 strip | rough wood structure

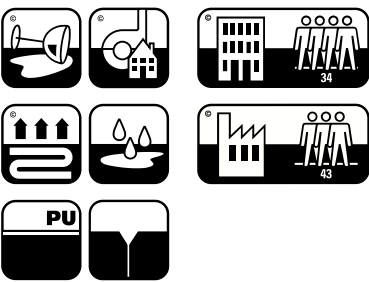

Technical information

Plank size:	1200 × 180 mm
Packaging unit:	3.24 m ² /box
Thickness:	2.5 mm
Wear layer:	0.7 mm



matching skirting board **1**

PRESTIGE

ACCESSORIES

To round off the attractive room effect of wineo® design floors, we also offer you the matching brand accessories for the collections. From skirting boards coordinated with the decor and profiles in a wood or metal finish, down to cleaning and maintenance products to match the floor and underlay material, you will find everything you need.



SKIRTING BOARDS



Matching skirting boards in wood finish

Matching skirting boards are the ideal solution for a very harmonious wall finish. You can find out which designs have matching skirtings in our accessories catalogue or in the decor overviews in this brochure.



Exclusive skirting board

We also offer the right skirting boards to meet your customers' special requests, be they in brushed aluminium or stainless steel finish, carrara or marble-look.

Clipstar

In order to fit the wineo® skirting boards quickly and easily, we recommend you use the Clipstar fastening system. This system enables invisible cable routing and can easily be removed should you want to paint or paper the walls.



FEATURE STRIPS

Using feature strips is suitable for all decors, to underline the natural wood planks or tile look.

SILENT COMFORT UNDERLAY MAT



The perfect underlay

The silentCOMFORT anti-slip and acoustic mat is an underlay material specially developed with Connect technology for use under design floors.



ALUMINIUM PROFILES

wineo® profiles are ideal for giving our floors a colourful and special looking finish to walls, adjoining thresholds or other structural elements. Besides the classic floor profiles made of aluminium, wineo® offers you a range of attractive wood looks for all finishes and transitions. The necessary expansion joint is also taken into account here.



Profitec Junior transition profile
Two-part aluminium profile for covering expansion joints



Profitec Junior adjustment profile
Two-part aluminium profile for transitions between different height floor coverings



Profitec Junior end profile
Two-part aluminium profile, e.g. for wall finishes



Transition profile PS400PEP
Screwed, two-part aluminium profile for covering expansion joints



Adjustment profile PS400PEP
Screwed, two-part aluminium profile for transitions between different height floor coverings




End profile PS400PEP
Screwed, two-part aluminium profile, e.g. for wall finishes







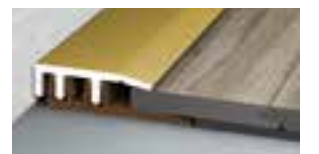

Profi design transition profile
Two-part aluminium profile for covering expansion joints
















Profi design adjustment profile
Two-part aluminium profile for transitions between different height floor coverings



Profi design end profile
Two-part aluminium profile, e.g. for wall finishes

SYMBOLS	EXPLANATIONS
	Wear class 23 – heavy-duty use in the home area
	Wear class 31 – medium use in the commercial sector
	Wear class 33 – heavy-duty use in the commercial sector
	Wear class 34 – very heavy-duty use in the commercial sector
	Wear class 42 – normal use in the light industrial sector
	Wear class 43 – heavy-duty use in the light industrial sector

MADE IN GERMANY


















SYMBOLS	EXPLANATIONS
	Standard quality
	Exclusive quality
	Premium quality
	For gluing
	For clicking in
	Panel goods
	Authentic joint technology
	Bevelled edge
	Suitable for installation on all conventional hot-water under-floor heating systems
	Stain resistance
	PU-coated
	Suitability for chair castors according to EN 425 for type W
	Suitable for damp areas





LAGUNA wood | Alba Oak Snow
CEI236LA

COLLECTION OVERVIEW

Collection		LAGUNA wood	LAGUNA stars	BACANA wood	BACANA stars	KINGSIZE	KINGSIZE	KINGSIZE	KINGSIZE	AMBRA round edge	AMBRA wood	AMBRA stone	AMBRA wood Multi-Layer	AMBRA stone Multi-Layer	SELECT wood	SELECT stone	PRESTIGE	PRESTIGE
																		
Measure	Product thickness in mm	5	5	5	5	5	5	2.5	2.5	2.5	2	2	9	9	2.5	2.5	2.5	2.5
	Wear layer in mm	0.3	0.3	0.55	0.55	0.3	0.55	0.3	0.55	0.3	0.3	0.3	0.3	0.3	0.55	0.55	0.7	0.7
	Decor length in mm	1212	600	1212	914	1505	1505	1505	1505	1200	1200	609.6	1204	595	1200	900	914.4	1200
	Decor width in mm	185	312	185	473	235	235	235	235	180	180	304.8	216	291	180	450	152.4	180
Packaging	m ² /box	1.793	1.872	1.793	2.594	2.122	2.122	3.54	3.54	3.24	3.89	3.34	2.08	1.56	3.24	4.05	3.34	3.24
	Planks or tiles/box	8	10	8	6	6	6	10	10	15	18	18	8	9	15	10	24	15
	m ² /palet	114.752	112.320	114.752	114.136	118.832	118.832	240.72	240.72	194.40	233.40	240.48	99.84	93.60	194.40	202.50	200.40	194.40
	Box/palet	64	60	64	44	56	56	68	68	60	60	72	48	60	60	50	60	60
Characteristics	Core board												HDF-Aqua-Protect®	HDF-Aqua-Protect®				
	PU-coated	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Bevelled edge	■		■		■	■	■	■						■		■	■
	Round edge technology									■								
	Real joint technology		■		■													
Utilisation class	Utilisation class for private application	23	23			23		23		23	23	23	23	23				
	Utilisation class for commercial application	31	31	33	33	31	33	31	33	31	31	31	31	31	33	33	34	34
	Utilisation class for industrial application			42	42			42							42	42	43	43
Technical information	Residual indentation in mm DIN EN ISO 24343-1	0.07	0.07	0.07	0.07	0.07	0.07	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
	Dimension stability EN 434	0.10 %	0.10 %	0.10 %	0.10 %	0.10 %	0.10 %	0.15 %	0.15 %	0.15 %	0.15 %	0.15 %	-	-	0.15 %	0.15 %	0.15 %	0.15 %
	Anti slip category DIN 51130	R9	R9	R9	R9	R9	R9	R9	R9	R9	R9	R9	R9	R9	R9	R9	R9	R9
	Slip resistance EN 13893	category DS	category DS	category DS	category DS	category DS	category DS	category DS	category DS	category DS	category DS	category DS	category DS	category DS	category DS	category DS	category DS	category DS
	Fire behaviour EN 13501-1	C _{fl} - s1 = B1	C _{fl} - s1 = B1	C _{fl} - s1 = B1	C _{fl} - s1 = B1	C _{fl} - s1 = B1	C _{fl} - s1 = B1	B _{fl} - s1 = B1	B _{fl} - s1 = B1	Bfl - s1 (B1)	Bfl - s1 (B1)	Bfl - s1 (B1)	Bfl - s1 (B1)	Bfl - s1 (B1)	Bfl - s1 (B1)	Bfl - s1 (B1)	Bfl - s1 (B1)	Bfl - s1 (B1)
	In combination with silentCOMFORT	B _{fl} - s1 = B1	B _{fl} - s1 = B1	B _{fl} - s1 = B1	B _{fl} - s1 = B1	B _{fl} - s1 = B1	B _{fl} - s1 = B1											
	Lightfast DIN EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
	Suitable for all standard warm-water heating systems	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Heat transmission resistance in m ² K/W EN 12667	0.033	0.033	0.033	0.033	0.033	0.033	0.01	0.01	0.01	0.01	0.01	0.06	0.06	0.01	0.01	0.01	0.01
	In combination with silentCOMFORT	0.0254	0.0254	0.0254	0.0254	0.0254	0.0254											
	Castor wheel traffic EN 425	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W	classif. W
	Footfall sound absorption EN 140-8	approx. 7 db	approx. 7 db	approx. 7 db	approx. 7 db	approx. 7 db	approx. 7 db	approx. 4 db	approx. 4 db	approx. 4 db	approx. 4 db	approx. 4 db	approx. 4 db	approx. 4 db	approx. 4 db	approx. 4 db	approx. 4 db	approx. 4 db
	In combination with silentCOMFORT	approx. 11 db	approx. 11 db	approx. 11 db	approx. 11 db	approx. 11 db	approx. 11 db											
	Chemical resistance EN 423	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Wear behaviour EN 660-2	group T	group T	group T	group T	group T	group T	group T	group T	group T	group T	group T	group T	group T	group T	group T	group T	group T
	Antistatic properties EN 1815	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV
Guarantee	Guarantee for private application according to Windmüller warranty conditions	15 years	15 years	20 years	20 years	15 years	20 years	15 years	20 years	15 years	15 years	15 years	15 years	15 years	20 years	20 years	25 years	25 years
Page		page 32	page 34	page 38	page 40	page 36	page 36	page 36	page 36	page 30	page 24	page 28	page 24	page 28	page 42	page 46	page 48	page 48